



ÉCOLE POLYTECHNIQUE
FÉDÉRALE DE LAUSANNE

SWISS PLASMA CENTER @EPFL

ANNUAL
REPORT
2017

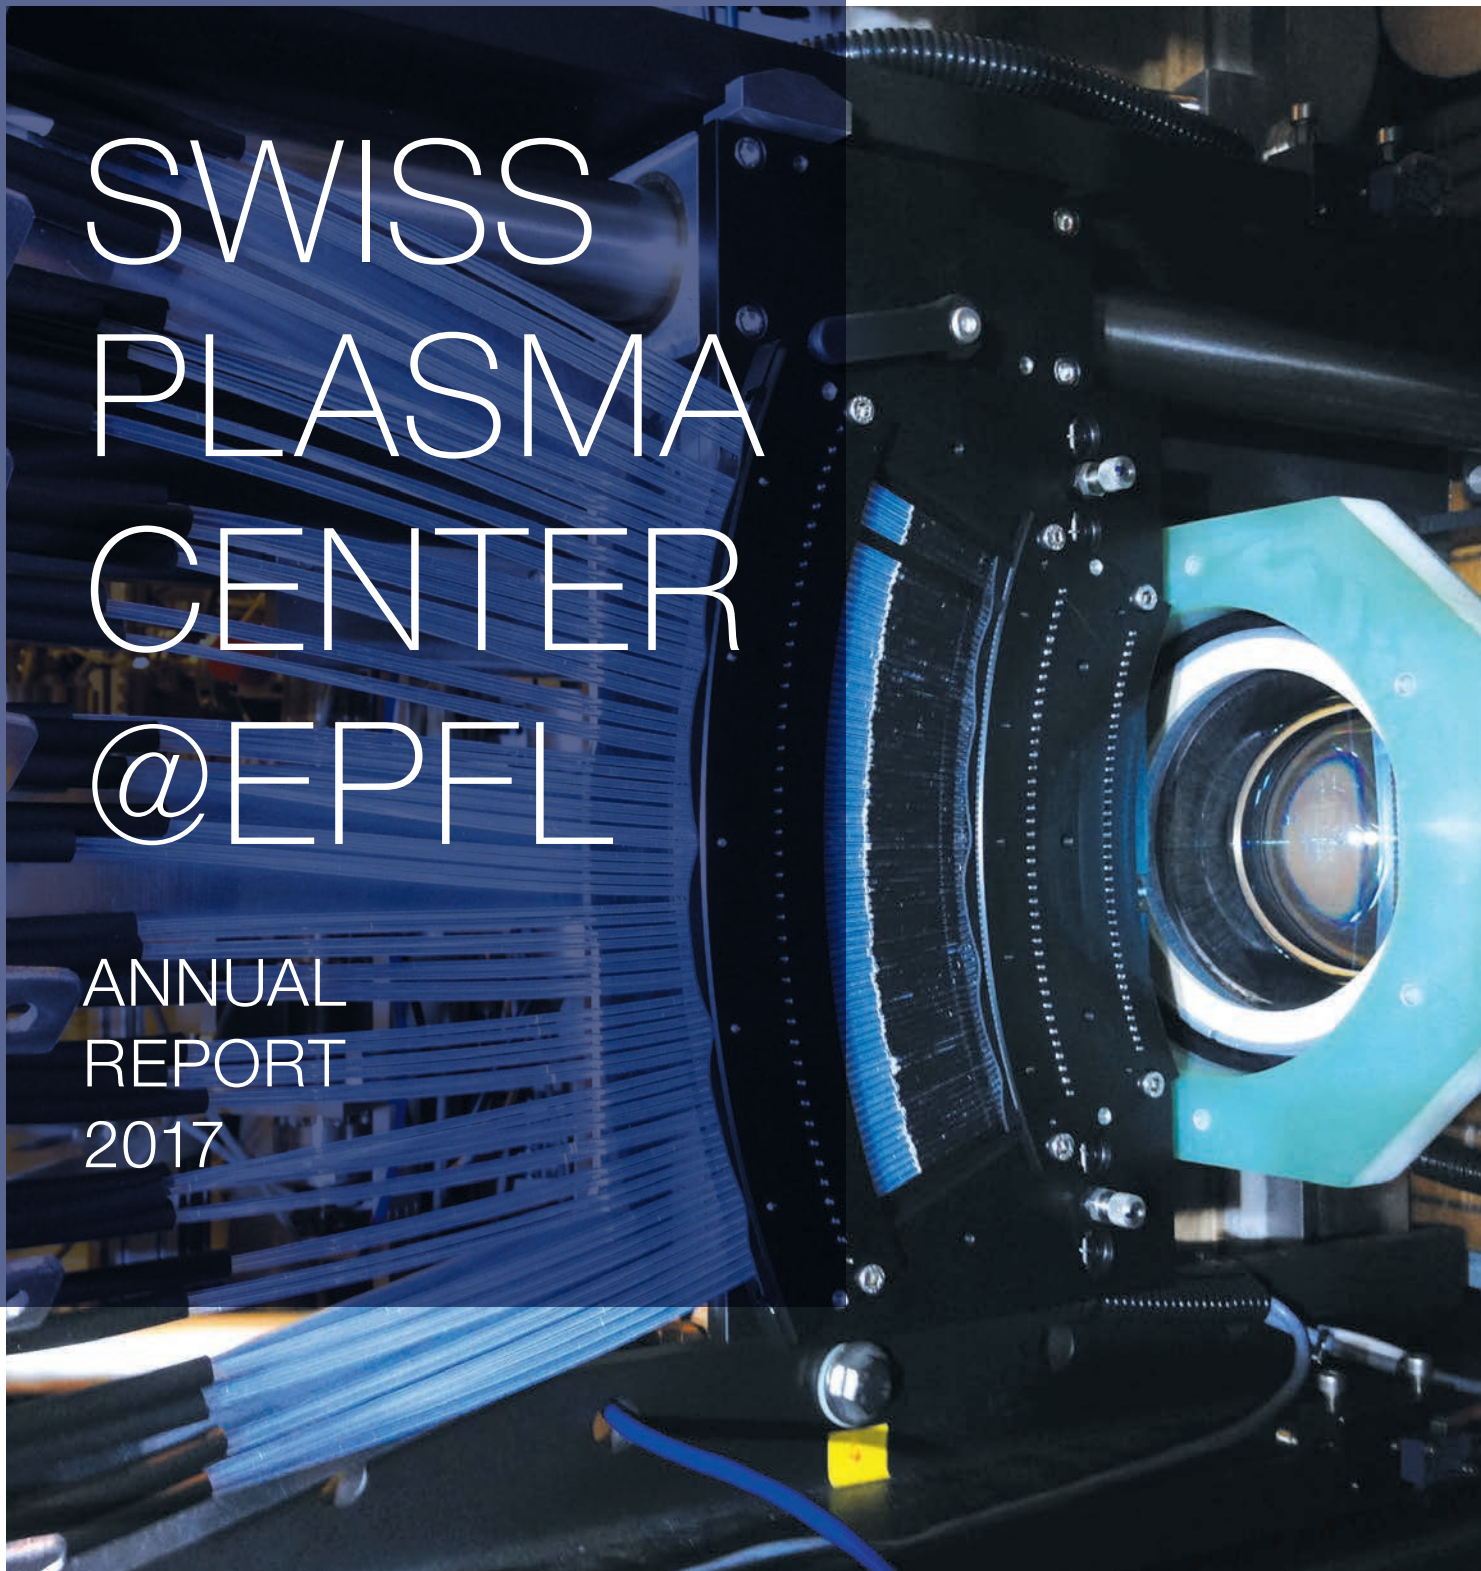


Table of contents

LETTER OF THE DIRECTOR	2
RESEARCH HIGHLIGHTS	4
TCV Tokamak	5
TCV Diagnostics	8
TCV Heating	10
TCV Boundary	12
Theory and Numerical Simulation	14
Basic Plasma Physics and Applications	18
Applied Superconductivity	20
International Activities – ITER	22
ITER, EUROPE AND SWITZERLAND	24
TEACHING	26
OUTREACH	28
SERVICES AND ADMINISTRATION	30
FACTS AND FIGURES	34

Letter of the Director



It is my pleasure to introduce this new format for the annual report of the Swiss Plasma Center, confident that this visually rich and relatively short summary of our activities will be appreciated by all of you.

The Swiss Plasma Center is a national laboratory embedded in an academic environment and contributes to the two grand challenges of fusion, namely to demonstrate the feasibility of fusion energy on ITER and to complete the physics and technology basis of DEMO. In addition, it exploits fusion and plasma spin offs for societal applications.

Based on the past achievements, the present infrastructure and the ongoing upgrades, our main experimental facility, the TCV tokamak, is set to play a major role worldwide. Its experimental campaigns are partly conducted and supported by EUROfusion, contributing to a significant overall financial return to Switzerland.

In 2017, TCV ran 774 successful plasma discharges for EUROfusion, 1436 for the domestic campaign, and hosted 107 international collaborators. The resulting rich scientific output embraces areas that can be explored uniquely thanks to its extreme flexibility, such as doublet plasmas, innovative divertor configurations or the influence of plasma shape on turbulence. It also includes areas that are investigated in synergy with the basic device TORPEX, such as the propagation of electron waves through turbulent plasmas, and areas that are made accessible by incoming collaborations, such as disruptions and runaway electrons.

These studies benefit from the recently installed capability of heating the ion population directly using neutral beams, the first step of the TCV heating upgrade project, which will be completed in 2019 with the installation of four new gyrotrons. Of these, two will be operated at the second harmonic of the electron cyclotron frequency, and two will have the option of being operated at the second or at the third harmonic.

TCV upgrades also include the installation of in-vessel baffles that create an exhaust chamber of variable closure, to investigate divertor configurations and regimes of interest for DEMO, as well as new diagnostic systems allowing a complete characterization of these configurations. The design of all of these elements has been significantly advanced in 2017.

The final steps of the ITER conductors' tests are taking place in our applied superconductivity group, in parallel with studies of high temperature superconductors, for DEMO and for the new generation of particle accelerators. Last year, an international team has been created to design the new version of the EDIPO test facility, which will produce a 15T magnetic field over a region of more than a meter, addressing the needs of high-energy physics and fusion communities.

The theory and numerical simulations group provided significant contributions to the preparation of ITER operation and the development of the DEMO physics basis, with an increasing focus on the coupling of the different regions of tokamak plasmas, the hot core, the colder edge, and the pedestal region in between, in synergy with experimental studies on TCV and TORPEX. In 2017, the latter explored the relation between intermittency in turbulence and suprathermal ion transport, of interest for burning plasmas as well as for space and astrophysics.

Several plasma applications for industry and society were investigated in 2017, with spin offs from our Center active for example to reduce the pollution in large freight ships, or to fabricate high precision components for high frequency microwave technologies. An important event was the initiation of a novel bio-plasma laboratory, whose initial focus is the issue of sterilization, addressed in collaboration with local companies and the EPFL Life Sciences Faculty.

Such a wide spectrum of activities, with more and more complex equipment and collaborations, imposes a way of operating that is increasingly multi-tasking. I would like to acknowledge that our scientific, technical and administrative teams successfully adapt to this with remarkable professionalism, dedication and flexibility, providing an example for the younger generations, whose education and training are a central part of our mission.


The ambitious perspectives of the Swiss Plasma Center are becoming reality, thanks to our stakeholders, among which are the ETH Board, the SERI, the EPFL Faculty of Basic Sciences and Institute of Physics, the Swiss National Science Foundation, InnoSuisse/KTI, CERN, ITER, Fusion for Energy and EUROfusion. They entrust our vision by providing us with the opportunity to always improve our infrastructure and, most importantly, support our personnel, which remains our best asset and continues to make our Center and its impact strong and unique.



PROF. AMBROGIO FASOLI

RESEARCH HIGHLIGHTS

The following pages describe our main research achievements in 2017. Rather than giving an exhaustive list of all progress made, we choose to show only the highlights that were attained in 2017, being understood that most often these are the outcome of a multi-year effort. These are presented by the respective heads of the research units that compose the SPC. It should be emphasized that behind each of these achievements there are teams of physicists, supported by strong technical and administrative staff, without whom success would not have been possible.

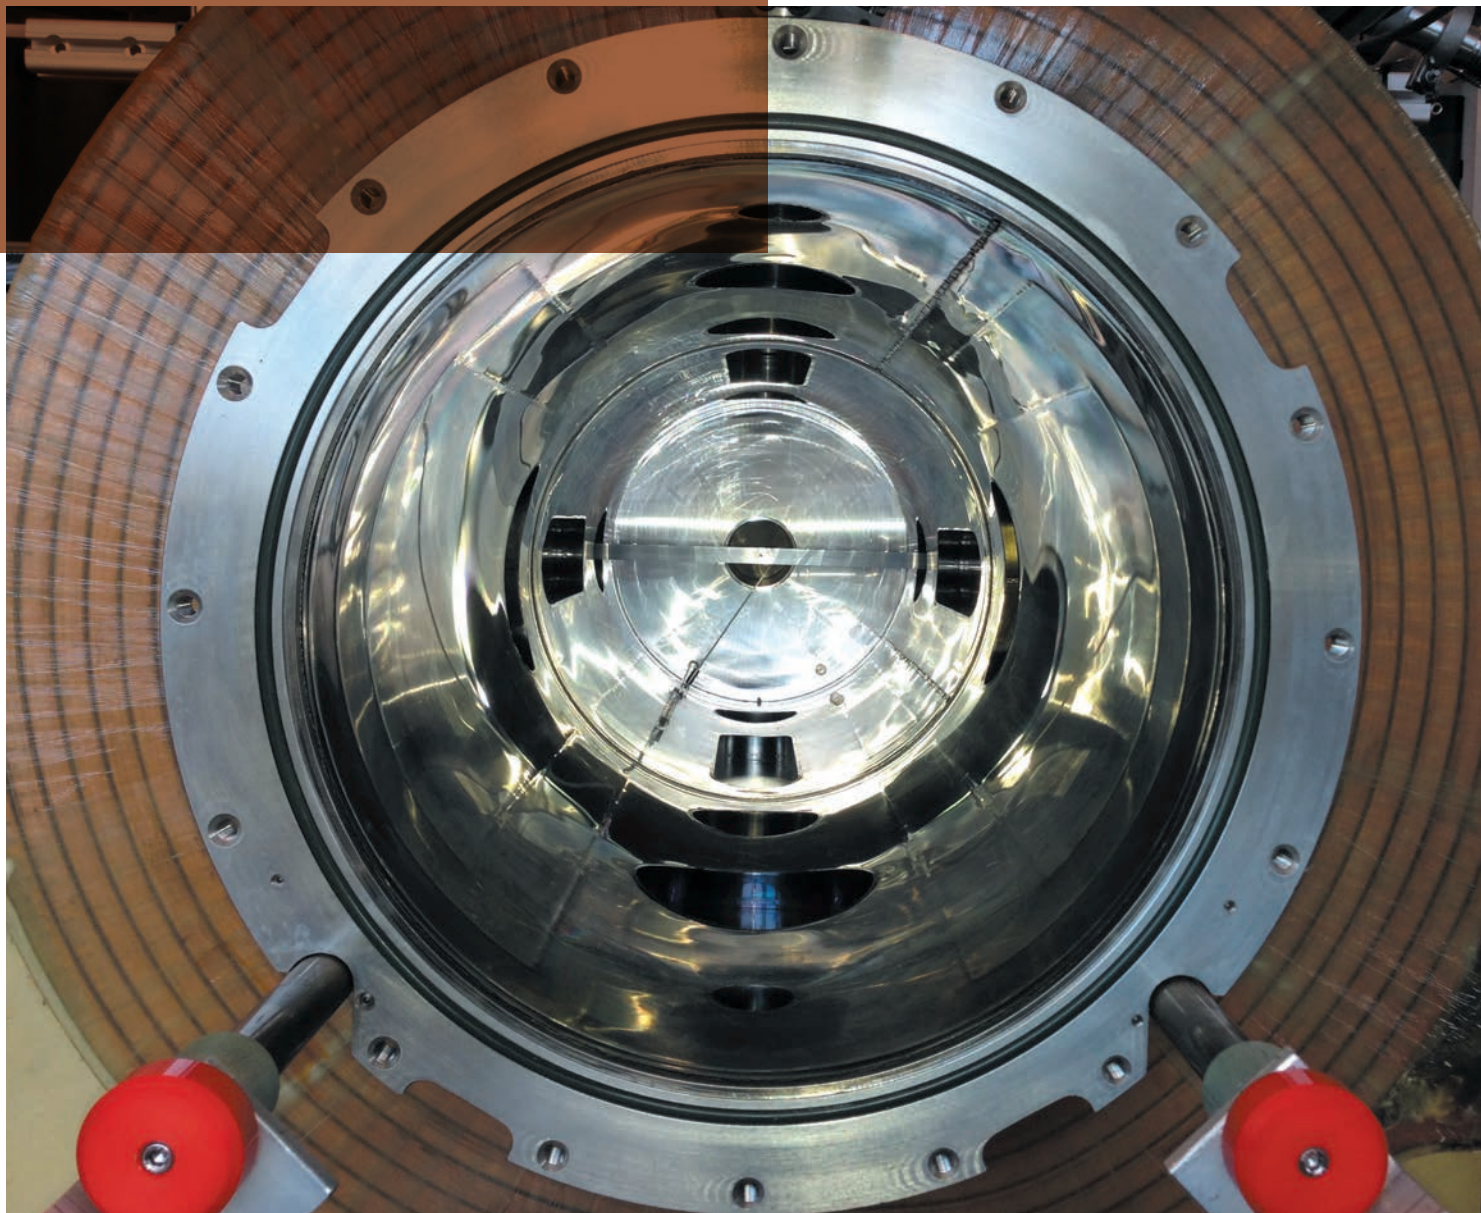

TCV Tokamak



The TCV Tokamak is a thermonuclear fusion experimental device and the flagship facility of the Swiss Plasma Center. The device is operated partly as a shared European facility under the auspices of

the Medium-Size Tokamak Work Package of the EUROfusion consortium, with the participation of over 100 international scientists in 2017. Ample operation time is also available to internally-organized experiments, including extensive research for PhD dissertations. Research topics range from preparations for the operation of ITER, to development of advanced concepts for a future DEMO device, to curiosity-driven fundamental investigations. Dr **STEFANO CODA**, Maître d'Enseignement et Recherche (MER, Senior Scientist), is leading the TCV operations and is exposing below what the main findings of this research were in 2017.

Reactor designers list disruptions as their top concern. These are violent instabilities that terminate the discharge and can release energy in uncontrolled ways that can compromise the integrity of the device. Disruption mitigation or avoidance techniques are a must for ITER and are accordingly being developed and studied in TCV. In particular, the use of electron-cyclotron heating to prevent or stabilize the instability has been thoroughly documented, while a disruption database was constructed to aid the controller development.

Highly energetic “runaway” electrons are often generated by the disruptive instabilities and constitute an additional concern associated with them, as they can also damage the device wall. Techniques for electromagnetic control of the runaway beams have been explored in 2017, in addition to the use of noble gas injection to dissipate them.

The plasma shape planned for ITER was emulated in TCV in the baseline ITER regime, the so-called high-confinement mode (H-mode) with regular ELMs - periodic events that regulate the plasma density and stored energy.

The H-mode derives its good confinement by the presence of a transport barrier at the edge, which insulates the plasma from the exterior, creating a pedestal in the plasma pressure. The properties of the pedestal and their variation in response to gas injection - which is required for fueling and control - were investigated extensively in TCV in 2017.

So-called Advanced-Tokamak scenarios, characterized by high fractions of externally injected or internally generated plasma current, are explored to free the tokamak from reliance on a transformer and approach the realm of continuous operation. These scenarios were studied for the first time in TCV with joint neutral-beam and electron-cyclotron heating and current drive, with no transformer action in steady state.

As neutral-beam heating is still a comparatively new tool for TCV, fundamental studies of the basic physics associated with it are underway. These focus primarily on the dynamics of fast ions generated by the ionization of the energetic beam neutrals. Measurements suggest that these ions are subject to enhanced transport from plasma turbulence.

Turbulence - which is believed to be at the root of most plasma transport - has itself been the subject of extensive investigations, focusing in particular on its dependence on the plasma “triangularity” (a parameter quantifying the resemblance of the plasma to a D-shape, which uniquely in TCV can even be negative, i.e., a reversed D-shape). Transport is known to be stronger with positive than negative triangularity, and the plasma is indeed found to be more turbulent in the former case, over a large fraction of the plasma volume. An additional finding has come from studying the so-called Geodesic Acoustic Mode, a plasma oscillation related to phenomena that regulate turbulence: it has been shown for the first time to be associated with oscillatory particle flow to the wall, providing new insight into its fundamental properties.

Understanding the physics mechanisms of tokamak plasma exhaust - the processes by which energy and particles leave the confined volume - is essential both for optimizing the overall performance and for protecting the vessel wall from excessive heat loads. Studies of edge transport, turbulence, and heat flux behavior have been vigorously pursued in TCV in 2017 in a panoply of regimes (low and high confinement, edge plasma detached or not from the wall) and magnetic-field topologies, including those of interest for ITER and for DEMO. The dependence of the heat flux on triangularity was also documented.

Real-time control of a variety of plasma parameters is now possible thanks to modern control techniques, and the next challenge is to integrate the different controllers into a coherent ensemble. Considerable progress was made on this front in 2017, with density, shape, stored energy, macroscopic stability and current profile all controlled simultaneously within a supervisory platform ensuring the most efficient use of the finite resources available.

DISRUPTIONS



Sometimes, the plasma in a tokamak “disrupts”, i.e. there is an abrupt termination of the plasma discharge, which has its origin in various types of instabilities. Disruptions are a critical issue for present and future tokamaks due to their potentially

destructive consequences. Disruptions are capable of melting the divertor through thermal loads, breaking apart the vessel through electromagnetic loads and creating runaway electron beams that can cut through the vessel wall. Current research is focused on three subtopics to handle this issue (disruption prediction, avoidance and mitigation) with the final goal of combining these subsystems into a complete disruption handling system. Dr **Umar Sheikh**, Post-Doc at the SPC, describes the major progress achieved in 2017.



Significant advances have been made in the past year on the TCV tokamak to utilize new tools to study large numbers of disruptive discharges with the goal of enhancing predictive capabilities. Scenarios with ITER relevant disruptive events have been developed and techniques to identify the disruptive chain and act to restore normal plasma operation or produce a safe shutdown have been developed and implemented. An example of this work is shown in Figure 1, where a particular instability, called “Neoclassical Tearing Mode”, (NTM) is destabilized through an impurity influx and causes the plasma to disrupt and be lost in a few milliseconds. An example of no action, leading to a disruption, and two discharges with the application of the disruption handling system developed leading to safe shutdowns are presented in the Figure below.

As ITER will rely significantly on electron-cyclotron heating using microwaves, predicting the effect of turbulence in a reactor-scale environment on the propagation of microwaves is of paramount importance. Systematic measurements of these effects are underway in TCV, and results in 2017 have indeed confirmed a correlation between power transmission fluctuations and plasma density fluctuations.

TCV is currently the only tokamak in which the so-called “doublet” configuration - a figure-of-eight topological arrangement - can theoretically be created. This is a concept suggested and initially investigated, unsuccessfully, in the 1970’s, with the promise of increased performance with a higher macroscopic stability margin. Modern control technology has revived this possibility and a successful doublet was achieved in 2017 in TCV with plasma current up to 260 kA. While steady state has not yet been obtained, data suggest the appearance of a transport barrier in the mantle just outside the primary figure-of-eight boundary.

1 Gyrotron power (top), stored plasma energy (middle), plasma current (bottom). The green and blue curves correspond to two cases with disruption avoidance control, the red curve without.

2 Windowed Fourier spectra of MHD activity for discharges with the avoidance control system (top and middle) and without (bottom).

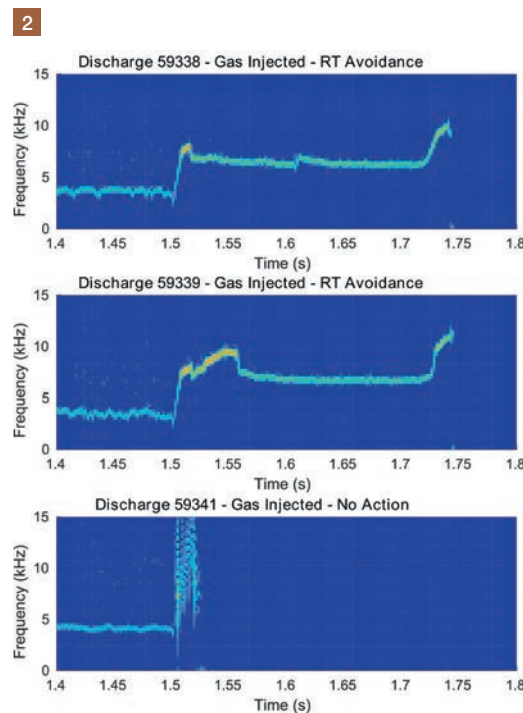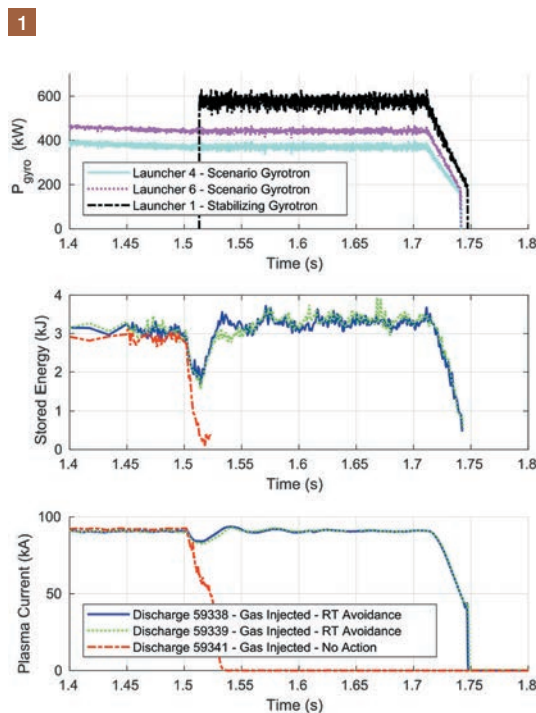

A TOKAMAK IN GOOD SHAPE - REDUCES TURBULENCE AND IMPROVES CONFINEMENT




Matteo Fontana, PhD student at SPC under the supervision of Dr Laurie Porte and Prof. Ambrogio Fasoli, was awarded the “Kyushu University Itoh Project Prize” at the 2017 EPS Conference on Plasma Physics for his research, which focuses on the measurement of turbulence in the plasma core using millimeter waves emitted by the plasma, using a diagnostic method called “correlation-ECE”. His work is applied to help us understanding the reasons behind a surprising finding on the TCV tokamak: by changing the plasma shape from a normal “D” to a reversed “D”, confinement is observed to improve by a factor of about 2. Normal “D” is referred to as “positive triangularity”, or “ $\delta < 0$ ”, and reversed “D” as “negative triangularity”, or “ $\delta > 0$ ”. These studies were made possible thanks to the unparalleled shaping capabilities and versatile heating systems of TCV.

The main results of this work can be summarized as follows. First, as shown in Figure 1, the improvement in quality of confinement, measured by the so-called “H-factor” (the higher, the better), for reversed “D” shapes persists throughout a very broad parameter range. This includes the electron to ion temperature ratio, T_e/T_i , the collisionality ($\nu_{\text{eff}} = 0.1 R Z_{\text{eff}} n_e / T_e^2$), and the total heating power.

Second, temperature fluctuations measured using the correlation ECE diagnostic, Figure 2, showed that reverse-“D” shape reduces fluctuations across the whole explored parameter range, and that this reduction in fluctuations is clearly correlated to the improved confinement.

This work has a strong potential impact. Most importantly, the range of parameters explored in these experiments includes regions of interest for future, large reactor-like tokamaks, namely low collisionality and T_e/T_i close to 1. In these conditions, negative triangularity was seen to strongly suppress fluctuations leading to significantly improved confinement. If these observations will be found to scale well with machine size, they could become a strong argument in favour of reverse-D-shaped tokamaks as an alternative design for future reactors. Moreover, these results were obtained in so-called “L-mode” of operation, which avoids the potentially dangerous Edge Localized Modes (ELMs) in the “H-mode” of operation currently foreseen in ITER.

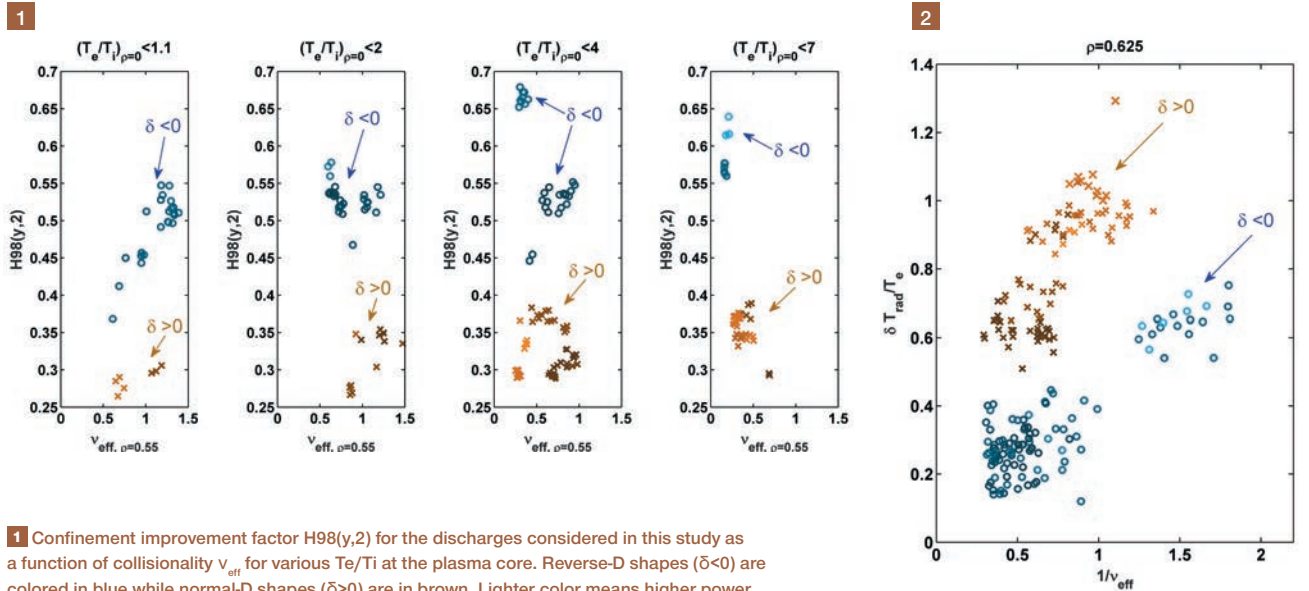

1 Confinement improvement factor $H98(y,2)$ for the discharges considered in this study as a function of collisionality ν_{eff} for various T_e/T_i at the plasma core. Reverse-D shapes ($\delta < 0$) are colored in blue while normal-D shapes ($\delta > 0$) are in brown. Lighter color means higher power.

2 Relative radiative temperature fluctuations as a function of the inverse of collisionality $1/\nu_{\text{eff}}$. (Colors same as in Fig.1.).

TCV Diagnostics




Plasma diagnostics are the scientists' eyes and ears in observing the experimental behaviour of the plasmas we are investigating. As such, on an exploratory machine such as TCV, these diagnostics are under constant evaluation and improvement as technology or experimental need provides or requires. Although there are many, highly interesting, diagnostic systems that probe very specific plasma behaviours, there is a base class of diagnostics that measure general plasma parameters such as the temperature and density profiles of the electrons and ions, plasma position within the TCV vessel and plasma radiated power. With the TCV upcoming divertor upgrades, these staple systems must not only be maintained but also modified to suit the upcoming requirements. Dr **BASIL DUVAL**, MER, is the leader of this research line and exposes below what were the main achievements in 2017.


Upgrades have been made to the TCV Thomson Scattering laser probe of electron density and temperature. Here, a bright laser is shone through the plasma and photons absorbed and re-emitted by the electrons are analysed by an array of spectrometers whose lines of sight intersect the laser trajectory (**Figure 1**). Upon re-emission, the photons have acquired the starting velocity of the target electrons such that an analysis of their spectral distribution, in terms of Doppler shifts reveals the velocity and density distributions of those electrons. With strong electron heating from our X2 and X3 gyrotron and heating and some extra degree of direct electron heating from the installed and upcoming neutral beam injectors, the electron's kinetic profiles are of strong interest. Furthermore these measurements allow us to estimate the temperature and density gradients in the plasma that are fundamental in determining the most active turbulence mode underlying enhanced energy transport.

For the planned future divertor upgrade, two major systems were enhanced. The spectrometer chord density was increased by the addition of over 80 new spectrometers. This was accompanied by new optical fibre mounts (**Figure 2**) that permitted the fibres, and hence their image in the plasma, to be closer, increasing the available spatial resolution to 6mm in the divertor and 12mm in the core region. In view of the large divertor region at relatively low temperature associated with the upgrades, a modification of the spectrometers to measure temperatures as low as 1eV was investigated. A new interference filter set design was examined for a new batch of 20 "low temperature" spectrometers that will view the existing laser line of sight through the divertor and should achieve a low temperature limit (determined by detector noise or signal strength) of about 1eV, which is a major achievement for such a system. These spectrometers are designed and built at the SPC and will be further integrated into the TCV real-time control system such that the measured temperatures can be employed, during the progression of a single discharge, to modify the plasma and divertor performance (**Figure 3**).


1

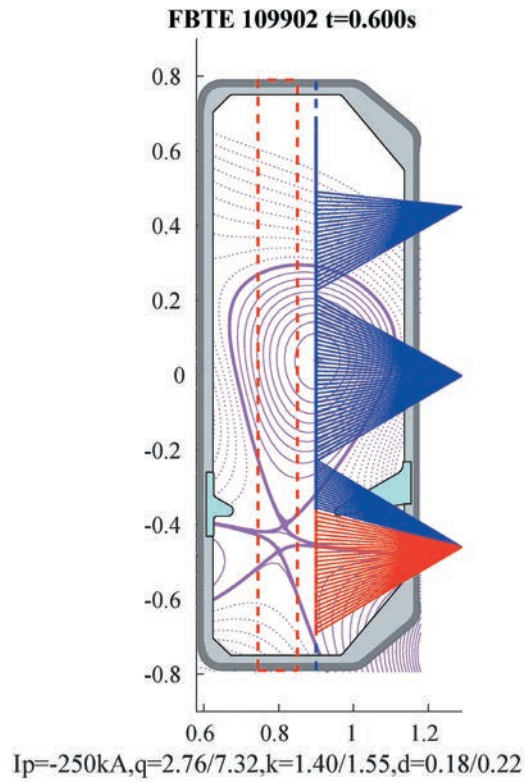

2

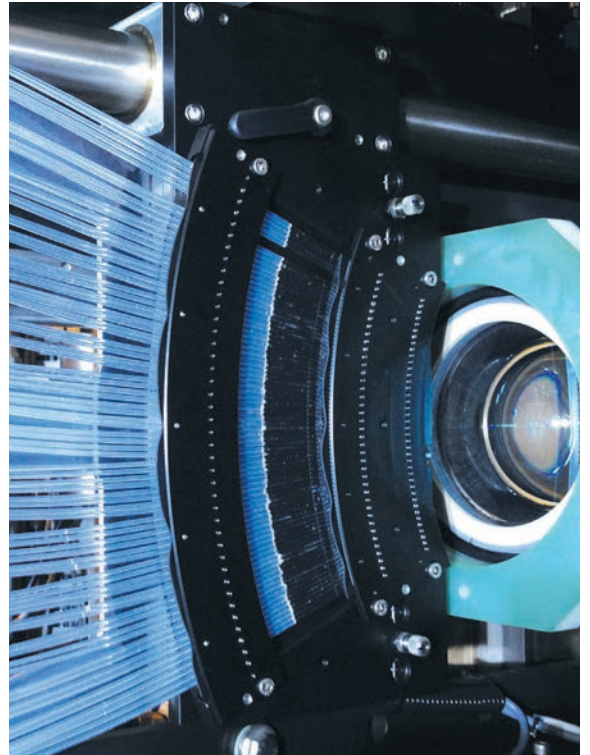

3

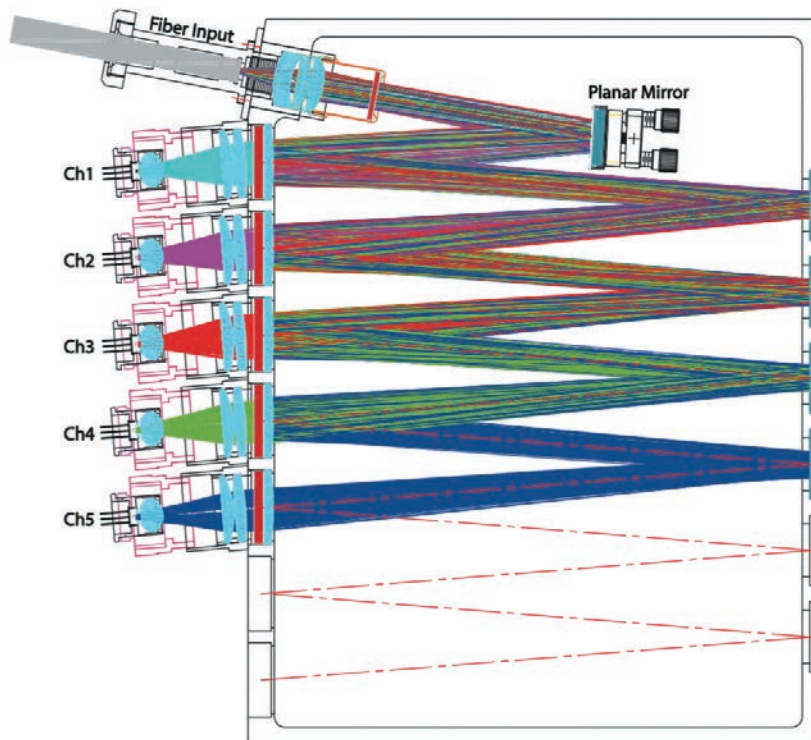

1 Poloidal cut of TCV vessel showing the vertical laser trajectory and the presently installed chords in blue. The red chords indicate the position of the new divertor low-temperature chords in development.

2 Photograph showing the new optical fibre holder system. This aligns the fibre laterally so that they intercept the laser beam through the plasma thus providing information for a range of plasma positions that can then be re-cast as an electron temperature and density profile.

3 Picture of the SPC designed spectrometers where up to 5 filters are used to distribute the light spectrally between 5 Avalanche Photodiode Detectors. The signal ratios are sensitive to the electron temperature and their amplitudes to the electron density.

TCV Heating



A variety of methods for heating a magnetized plasma are presently being used in Tokamaks, from irradiating it with neutral high-energy particle beams (NBI, Neutral Beam Injection) to exposing it


to high-power radio waves at frequencies chosen such as to match one of the natural modes of oscillation in the plasma, where the waves can then be absorbed, such as Electron Cyclotron Waves (ECW). The TCV Heating research line is led by Dr **STEFANO ALBERTI**, MER. It includes both ECW and NBI and its activities are described below.

TCV ELECTRON CYCLOTRON HEATING SYSTEM AND ITS UPGRADE

The use of millimeter radio waves at the highest normal mode frequencies, the electron cyclotron waves (ECW), has the potential to very locally deposit energy and eventually control instabilities of a fusion plasma as well as heating it. An additional advantage is that ECW propagate seamlessly from free space to the plasma with no regions of evanescence, which significantly simplifies the launching system (the “antenna”).

The ECW are generated by a coherent source, known as gyrotron, capable of producing more than a megawatt radiation at frequencies typically ranging from 80GHz up to and even in excess of 200GHz, as foreseen for a future device such as DEMO. Gyrotrons belong to the family of coherent radiation sources based on intense electron beams. The physical mechanism of a gyrotron is based on the relativistic dependence of the electron cyclotron frequency on the electron kinetic energy and an associated instability known as the “negative mass instability”.

TCV EC-system upgrade with two 1MW/2s dual-frequency 126/84GHz gyrotrons including two new top-launchers

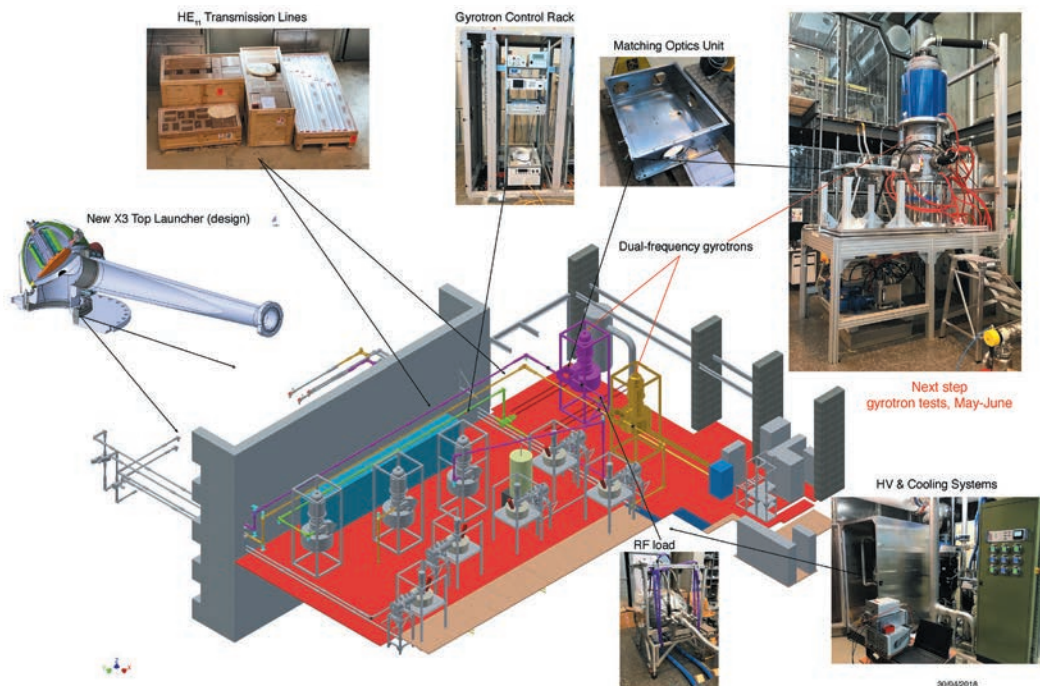

TCV EC-system with dual-frequency gyrotrons included. Depending on the frequency generated (126 or 84GHz), the mm-wave radiation is directed via the Matching Optics Unit towards the corresponding existing transmission lines for top-launch (X3@126GHz) or low-field-side launch (X2@82.7/84GHz or X3@118GHz). The insets showing the first dual-frequency gyrotron with different gyrotron auxiliaries: control and protection units, High-Voltage and cooling systems, Matching Optics Unit, high-power calorimeter (rf load), the transmission lines and the design of the X3 top launcher.

During the last two decades, SPC has been very active in the physics and technology of electron cyclotron heating (ECH) systems from the source (gyrotron) to the plasma, in developing and exploiting the ECH system for the TCV tokamak, but also, via international collaborations, in the development of ECH systems planned on ITER and DEMO.

Several decades of intensive R&D activity on theory, experiment and industrial development were needed to develop a state-of-the-art gyrotron meeting all the necessary requirements for the presently operated fusion devices and in particular for ITER. In Europe this effort is carried out by the EGYC consortium in which SPC is one of the main actors. The present dominant activity within EGYC, together with the industrial partner, the French company Thales Electron Devices (TED), is devoted to the industrialization of the gyrotron for a series production in view of providing the electron cyclotron heating system of ITER. In parallel to this activity, EGYC is pursuing R&D aimed at significantly increasing the unit power as well as the frequency in view of the future demonstration power plant DEMO.

The ECH system on TCV has been very successfully operated for more than two decades and has been realized, in its main parts, based on the scientific and technological expertise established at SPC. This activity was also supported by collaborations with the EGYC partners.


The ongoing upgrade of the TCV EC-system includes two additional MW-class dual-frequency gyrotrons (84 or 126GHz/2s/1MW) each equipped with a dual-frequency matching optics unit (MOU), which redirect the ECW towards the corresponding launchers for second (X2) or third harmonic (X3), X-mode plasma heating. The dual-frequency gyrotrons have been designed based on numerical models developed at SPC and in collaboration with EGYC members. Using state-of-the-art technology, they are being manufactured by TED. With the aim of simplifying the main entry in the TCV vessel, a new launcher for the X3 heating is foreseen. The MOU and the X3-launcher have been designed in-house and will be manufactured at SPC using a state-of-the-art 5-axis milling machine. The complex system integration in the TCV global system has been fully designed, manufactured and is being commissioned.

The upgraded ECH system will be operational in the 2nd half of 2019.

NEUTRAL BEAM POWER INJECTION ON TCV

TCV has continued the strategic task of adding direct ion heating to complement the strong electron heating provided by the gyrotrons. The first 1MW 25keV beam was installed in 2015 and has successfully heated the ions and injected tangential momentum into TCV plasmas more than tripling the ion temperature and resulting in a fivefold increase of the toroidal rotation velocity. For higher plasma densities and fast ion studies, a second 1MW 50keV beam is being procured. This beam also injects tangentially but opposite to the existing beam permitting balanced momentum injection. A range of fast ion diagnostics is also planned, with Neutral Particle Analysis (NPA), Fast Ion Dalpha Spectroscopy (FIDA) and Fast-Ion Loss Detection (FILD) already being procured.

Heating beam with tangential injection into the TCV tokamak

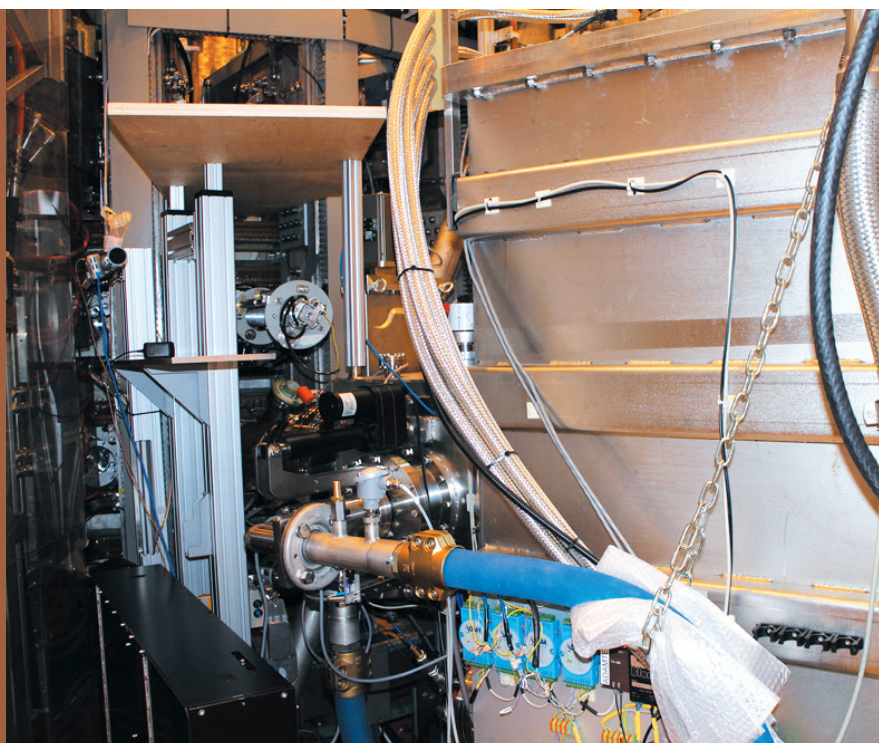

TCV Boundary



The TCV Boundary Group is led by Prof. **CHRISTIAN THEILER**. He explains us below what the main objectives of his group are, and what were the notable achievements in 2017.

The tokamak boundary plasma needs to assure adequate confinement of the superhot, 100 million degrees centigrade fusion core without damaging the surrounding wall structures. By leveraging TCV's unique magnetic shaping capabilities and excellent diagnostics accessibility, the Boundary Group works on advancing the fundamental understanding of the complex, turbulent boundary plasma and developing improved solutions for a reactor.

The most promising way to limit the heat flux to the wall structures surrounding the fusion plasma is to operate in a detached regime, characterized by a cold plasma near the wall and reduced plasma-wall contact. Access to a detached regime is facilitated by increased transport across magnetic field lines, high density, and the controlled addition of impurity species such as nitrogen. Unfortunately, there is a fine line between efficient protection of the wall by a detached plasma and adverse effects on the performance of the fusion core. Over the past few years, it has become ever clearer that alternative magnetic geometries of the boundary plasma have a large potential to address these critical issues.

In 2017, recent studies of detachment characteristics in the most promising alternative geometries in TCV low-confinement (L-mode) plasmas have been extended to the more challenging and reactor-relevant high-confinement (H-mode) plasma operation. H-mode was successfully achieved in all the alternative geometries with little difference in access conditions and H-mode characteristics. Signs of detachment have been demonstrated in these plasmas, pathing the way to explore its dependence on geometry and experimentally verifying predicted benefits. In parallel, a better fundamental understanding of the detachment process in L-mode plasmas has been achieved through novel spectroscopic techniques and comparison with modeling. The dependence of cross-field transport on magnetic geometry could also be elucidated in the experiment and partly reproduced in turbulence simulations, identifying clear benefits in particular in so-called Snowflake and "long-legged" configurations.

In the coming years, TCV will undergo substantial enhancements to further contribute to the development of a viable tokamak boundary solution. At the heart of these activities is the installation of physical barriers in TCV. These barriers will increase the density of neutrals and impurity species in the region of plasma-wall contact, which is key for detachment in high power plasmas. The design of these barriers, optimized for best performance while being resilient to the heat fluxes and electromagnetic forces during normal and off-normal operation, is close to being finalized. For optimal physics exploitation, the diagnostics coverage of the boundary plasma is being increased substantially with novel diagnostic systems developed at the SPC workshop and in collaboration with external collaborators, in particular from MIT, UCSD, DIFFER, and the University of York.

SHAPING THE PLASMA TO REDUCE THE POWER LOAD TO THE WALLS



Research carried out by **Roberto Maurizio**, PhD student at SPC under the supervision of Dr H. Reimerdes, has reached important milestones in 2017. The central theme of this research is the investigation of how the power leaving the main hot plasma reaches the wall, and, more specifically, how we can possibly act on this by operating the tokamak in different, novel configurations.


In the conventional *Single-Null* magnetic configuration, shown in Figure 1, the heat and particles leaking from the superhot plasma impact on the machine walls at two distinct locations, known as *strike points*. In the alternative *Low-Field-Side Snowflake Minus* magnetic configuration, shown in Figure 2, the addition of a secondary X-point creates two additional strike points, and produces an extended region, between the X-points, where the magnetic field is almost purely toroidal. This results in an increased magnetic field line length, which is beneficial for volumetric power losses and therefore could *play a key role in reducing wall heat fluxes*. These attractive power exhaust properties make the Snowflake a possible candidate for a nuclear fusion reactor.

A recent study on TCV provides evidence that cross-field transport is substantially enhanced in the intra-null region of the Snowflake. In this study, the deposited heat fluxes at all four strike points have been measured by an infrared thermography system. These measurements were performed for increasing spatial distance dr_{x2} between primary and secondary separatrix, shown in Figure 2 in blue and red respectively. Then, the variation of the power measured at SP4 with the separatrix distance, shown in Figure 3, is compared to a simple model to extract the width of the heat flux exhaust channel in the intra-null region. The observations point towards a local enhancement of the *effective cross-field diffusivity*, i.e. the strength of perpendicular transport, which imply an important benefit of the Snowflake geometry, but also give new insights into the dynamics of cross-field transport in general.

1 The Single-Null magnetic configuration, with the inner (ISP) and outer (OSP) strike points.

2 The Low-Field-Side Snowflake Minus magnetic configuration, with four strike points and two x-points.

3 Measured variation of the power reaching the strike point SP4 when the spacing between the separatrices dr_{x2} is increased and interpretation based on a simple heat transport model.

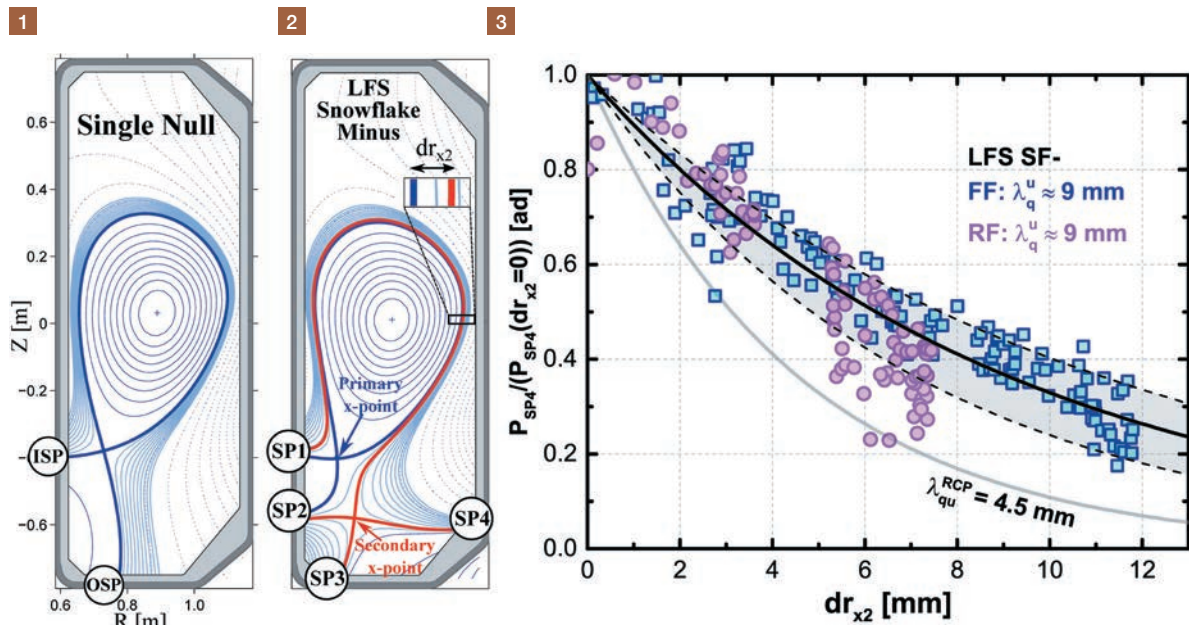

Theory and Numerical Simulation



The Theory and Numerical Simulation group at SPC is headed by Prof. **PAOLO RICCI**. He explains us the main motivations behind the activities of his group:

The main goal of the theory group at SPC is to make progress in the understanding of the plasma dynamics in magnetic confinement devices for fusion. Our research is based on first-principles and has the double perspective of providing an interpretation of the experimental results from current fusion experiments (*postdiction*), but also to make true predictions about future experiments. The equations governing the plasma dynamics are too complex to be solved analytically, and therefore we are heavily relying on numerical simulations. The theory group has very close ties with the TCV group, with a vigorous activity of modeling and interpretation of experimental results.

In 2017 the activities of the SPC theory group have focused on the analysis of global instabilities that affect the tokamak plasma, 3D magnetic configurations, and the interaction with fast particles. First principle based simulations of plasma turbulence in the core and periphery of fusion devices were performed, following important progress in the development of model and simulation tools, and shedding light on some turbulent processes at play in tokamaks. Activities on real-time simulations and predictions, pioneered by the SPC, continued. Some highlights are given below.

ON GLOBAL INSTABILITIES AND 3D CONFIGURATIONS

Even though tokamaks are designed to have an axis of symmetry, sometimes this symmetry is spontaneously broken. This is the result of an instability that develops and saturates at finite amplitude. Our group has pioneered the analysis of this final state from the point of view of 3D equilibrium theory. To this end, we deployed a code ordinarily used for studying the plasma equilibrium in stellarators* to model equilibria in tokamaks that present a 3D structure. This 3D equilibrium approach was verified with analytic nonlinear solutions of pressure and current driven external instabilities.

ON IMPURITIES

Another “hot topic” in fusion research is the problem of impurities, i.e. ion species distinct from the hydrogenic ions that constitute the fuel. The presence of impurities in the plasma core is detrimental for two main reasons: it dilutes the fuel species and enhances energy losses by radiation, with both effects resulting in a decrease of fusion power. The fast ions (helium) that result from the fusion reaction, on the other hand, need to be confined long enough so as to give back their energy to the fuel species. We have made several advances in the modelling of fast particle and impurity transport. Our research has focused on the effect of global instabilities in the presence of the symmetry-breaking modes mentioned in the previous paragraph.

ON TURBULENCE

Turbulence is known as the main limiting factor for the quality of magnetic confinement. We are constantly working on refining the physical models that describe various types of turbulence in our simulation codes. Adding more physics, however, can result in intractable complexity and, for practical purposes, we are often forced to find compromises between a full physics description and a reasonable time-to-solution. An example is the so-called “hybrid” electron model that has been successfully introduced in one of our flagship codes, ORB5, which can describe certain classes of electron-driven turbulence simultaneously with ion-driven turbulence, while saving computing resources by at least one order of magnitude as compared to standard kinetic electron models.

Similarly, the simulation of the plasma dynamics at the tokamak periphery, while remaining a crucial issue on the way to fusion energy, is made particularly challenging by the multiphysics nature of this region, and the lack of a proper model that can represent the different collisionality regimes within a reasonable computational cost. In 2017, we significantly advanced the development of a proper description for the tokamak periphery. A drift-kinetic model was developed that can represent plasma at low collisionality and, in the high collisionality regime, reduces to a fluid model. We expect this model to be a considerable step forward in the simulation of the tokamak periphery.

Thanks to our numerical simulations, significant progress was made in the understanding of core tokamak plasma turbulence. One of our studies, using the GENE code, revealed a measurable effect of plasma shaping on the turbulent transport of momentum. More precisely, we examined plasma shapes that break the mirror symmetry. Using these numerical results, we could design TCV experiments, which were then carried out and could be successfully compared to our theoretical predictions. In another study, we could use our simulation results to reduce the uncertainty on physical parameters, therefore allowing closer comparisons between experiments and theory.


ON DISRUPTIONS AND REAL-TIME CONTROL

Fusion tokamak reactors require high performance while avoiding any disruption limits. This can only be achieved with real time simulators run while the discharges are executed, which provides real-time physics information about the discharge evolution. In 2017 we further developed codes and models that can accurately predict and interpret tokamak radial transport phenomena and run faster than real-time in a fusion reactor. In this way one can predict ahead of time if the discharge will reach an operation limit and avoid it. This is used in present tokamaks for integrated real-time control and disruption avoidance studies.

- * A stellarator is an alternative way to confine plasmas in a torus with magnetic fields. In a stellarator, the helicity of the magnetic field, which is necessary to confine the charged particles of the plasma, is produced by deforming the magnetic field shape using external coils, and not by inducing a strong current flowing in the plasma as is the case for tokamaks. In a stellarator, due to this deformation, the toroidal axisymmetry is necessarily broken, hence the term '3D' characterizing these configurations.
- ** PASC = Platform for Advanced Scientific Computing, a structuring project supported by the Federal Council for the ETH Domain, whose overarching goal is to position Swiss computational sciences in the emerging exascale-era.
- *** GPU = Graphics Processing Unit, used as an accelerator in High Performance Computing.
- **** Fusion triple product: is the product (density) x (temperature) x (confinement time). It is used to quantify the performance of a given plasma experiment. In order to achieve sustainable fusion, this triple product must exceed a given value.

NUMERICAL SIMULATIONS AND HIGH PERFORMANCE COMPUTING (HPC)

To get insight into the plasma dynamics state-of-the-art scientific codes are necessary, based on a first-principles approach. The simulations carried out by the group are performed on some of the most powerful computers worldwide. Tens of millions of CPU-hours were allocated to projects led by SPC theory group members; we mention, among the HPC platforms used by the group in 2017, the Marconi-Fusion computer at CINECA, and the Piz Daint computer (the fastest in Europe and the third worldwide) at the Swiss National Supercomputing Centre (CSCS). In order to tap the increasing power and complexity of these platforms, major code refactoring is sometimes necessary. In 2017, in part thanks to the support of the PASC initiative**, a major effort has been put on the ORB5 code, which simulates turbulence in the core of tokamak plasmas. An increased level of parallelism, algorithmic changes and data restructuring resulted in a performance increase by a factor of about 2. New architectures such as GPU***-equipped computing nodes have also been addressed, which have the potential to further reduce the time-to-solution by important factors for our application code ORB5.

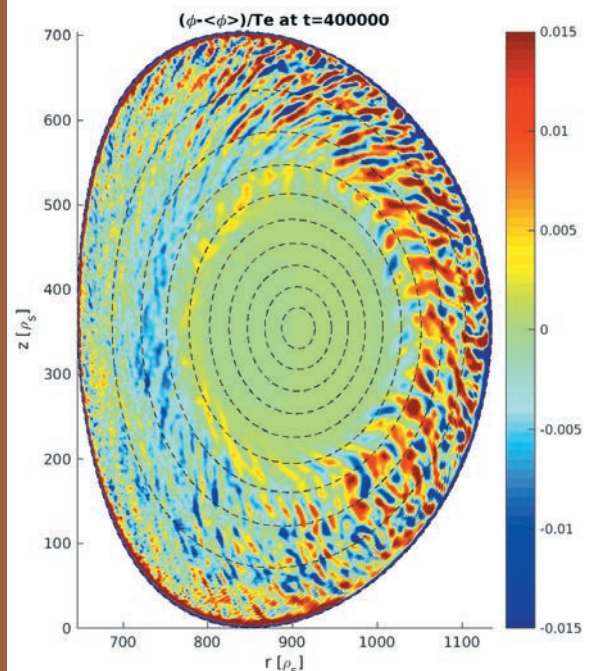

MODELLING ICRH IN 3D PLASMAS




Dr **Jonathan Graves**, MER, is a senior scientist in the theory group of SPC. With his team of PhD students and post-doctoral associates he explores the fast ion generation by RF waves and Neutral Beam Injection (NBI) and their confinement properties in 3D configurations.

The groundbreaking new Wendelstein 7-X stellarator* has recently commenced operation, in Greifswald, Germany. While it has already broken the world record into the fusion triple product**** in a stellarator, it awaits new auxiliary ion heating systems. One such system is ion cyclotron resonance heating (ICRH), the implementation of which will heat the core plasma further, but more crucially should test whether the advanced stellarator approach towards a fusion reactor can confine fast ions such as alpha particles resulting from the fusion process. The modelling of the wave-particle interaction required in these strongly three-dimensional magnetic fields is extremely challenging. At SPC we have developed the SCENIC ICRH package, uniquely equipped for the modelling of most ICRH schemes envisaged in W7-X. The intrinsically 3D structure of the electric field produced from the ICRH antenna is shown in Figure 1. We have recently deployed a method of exploiting the 5-fold periodicity of the W7-X device to significantly improve the resolution of the simulation for the same memory requirements. Another advance is the deployment of a so-called “5 1/2D” model for the description of ion orbit-following and wave-particle interaction in a time-varying electromagnetic field. The method combines the advantages of previously known methods: it has the speed of less accurate 5D models and nearly the precision of complete 6D models.


Stellarators have very high density in comparison to similarly sized tokamaks, and as such the collisionality of stellarators makes it difficult to produce a superthermal population from ICRH. Our main finding was to show that it is possible to generate such populations with so called 3-ion schemes. In Figure 2, it is shown that 3-ion schemes produce improved heating to the plasma as compared to standard minority heating schemes. It is seen that the proposed NBI heating scheme also produces reasonable core heating, but new simulations recently performed demonstrate that it is possible to further energise NBI ions with ICRH, with the dual advantage of highly core centered heating and the generation of super-thermal ions.



1

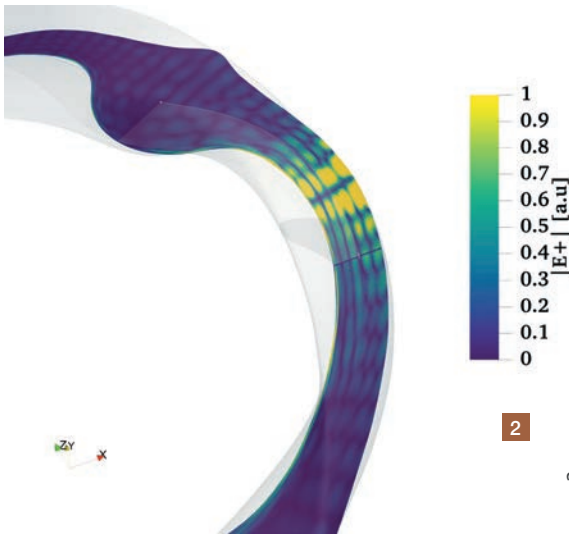

1 ICRH wave left-handed electric field component in the W7-X stellarator. Computed by the global full wave 3D finite element code LEMAN, part of the SCENIC package.

2 Power density as a function of plasma radius ρ , for various heating schemes proposed in W7-X. This shows the superiority of the new 3-ion ICRH scheme over the standard minority ICRH. It also shows a synergetic effect of the combined application of RF and Neutral Beam Injection (RF-NBI).

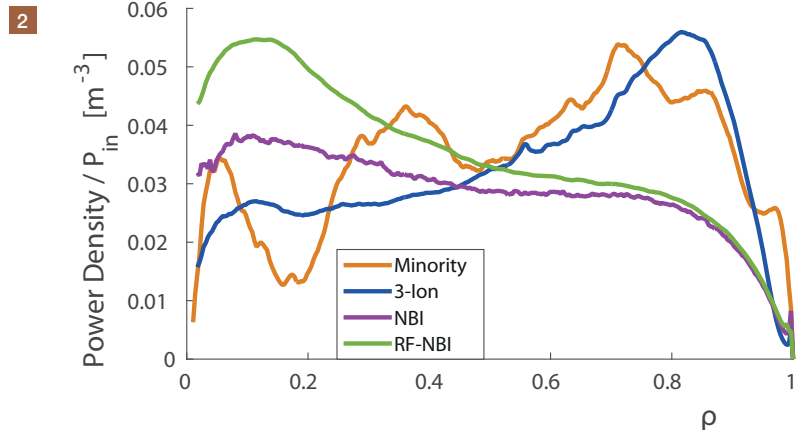

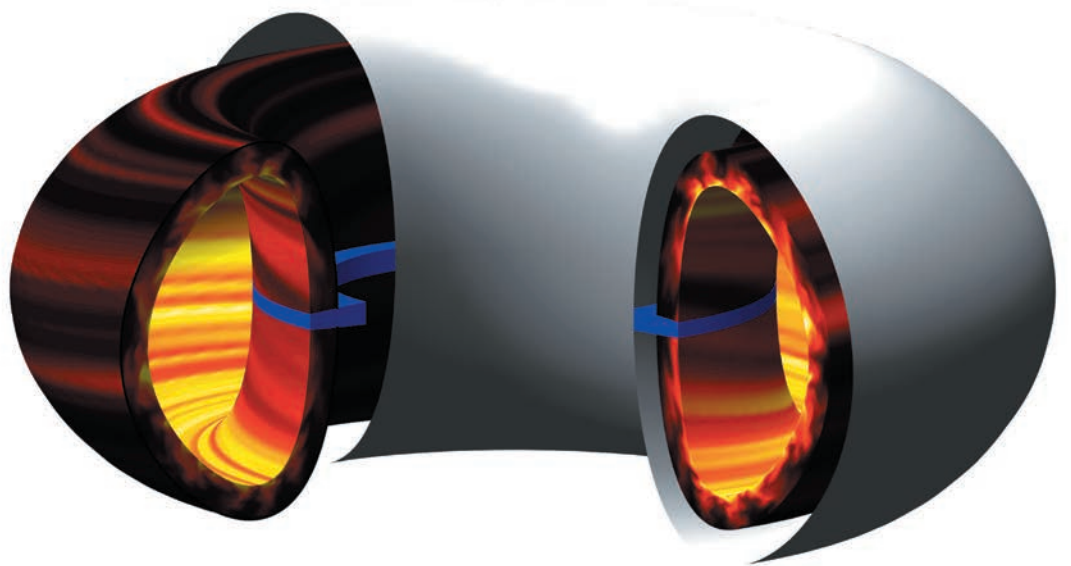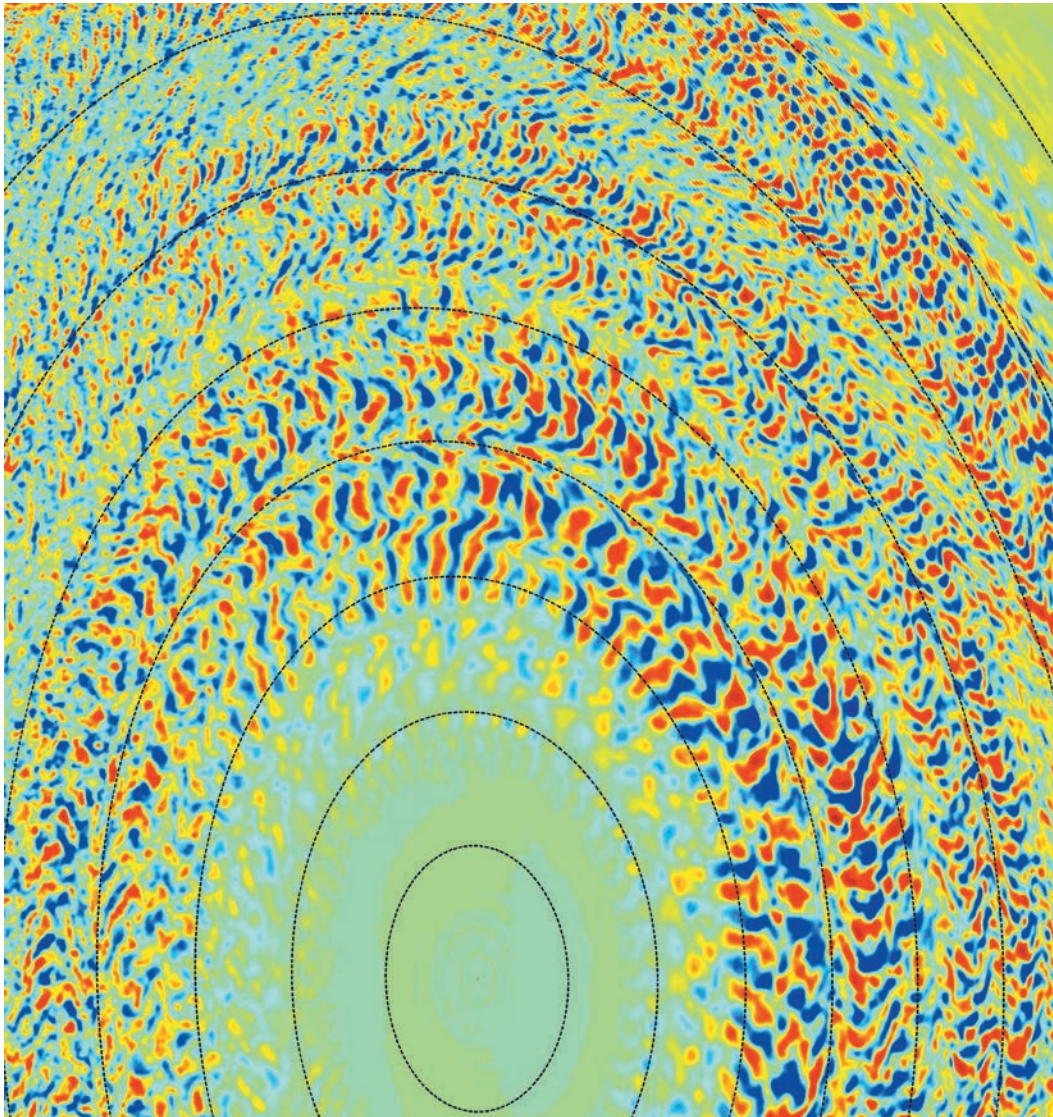

Basic Plasma Physics and Applications



In 2017, Dr **IVO FURNO** was named EPFL Adjunct Professor. He is heading the Basic Plasma Physics and Applications group, whose activities are focused on two topics. First, plasma turbulence in magnetized

plasmas of relevance for fusion is studied on the TORoidal Plasma EXperiment (TORPEX) device. Second, the development of a novel negative ion source for Neutral Beams is being carried out on the Resonant Antenna Ion (RAID) device. Combining a full set of plasma diagnostics together with theory and numerical modeling we advance the basic understanding of the underlying plasma phenomena to a level where quantitative comparison between theory and experiments are possible.

FAST IONS ON TORPEX

In fusion plasmas, fast ions from fusion reactions, ion-cyclotron heating or neutral beams have long been a center of interest since their turbulent transport can affect energy deposition and plasma heating. In TORPEX low temperature plasmas, these fast ions are generated by a Lithium source and detected after propagation through the turbulent plasma. Our research focused on studies of intermittence in detection signals of fast ions. A comprehensive set of experiments showed that the signal statistics varies with the detector location, even in the same fast-ion transport regime. These observations suggest that the degree of intermittence, as measured with time-series skewness, may not be an indicator of a particular transport regime. A theoretical model was developed to explore the relationship between different time-series statistics.

FLUORESCENT PROBE ON TORPEX

TORPEX has excellent coverage of Langmuir probes, which enables the determination of transient plasma structures with great temporal resolution. However, the spacing between probes limits the spatial resolution, thus preventing us to observe fine scales structures of interest. To resolve small spatial features, we developed a novel diagnostics based on a cathodoluminescent screen that emits light when struck by plasma electrons. A first series of tests showed the feasibility of this method of detection for increased spatial resolution.

RAID

Neutral Beam Injectors (NBIs) for future fusion devices will be based on negative deuterium ions and will have to fulfill high standards in terms of spatial uniformity of the beam, operate in

continuous mode (CW), and minimize the co-extracted electron current. On RAID, we explore the possibility to use bird-cage resonant antennas as helicon plasma sources to produce negative ions in the next generation NBIs. In 2017, we demonstrated stable operation in both hydrogen and deuterium for working nominal conditions. Using optical emission spectroscopy together with a collisional-radiative code, we show promising results in terms of negative ion production, reaching negative ion densities of relevance for future applications, dissociation degree and favorable scaling with injected radio-frequency power.

BIOLOGICAL APPLICATIONS OF NON-THERMAL PLASMAS

Non-thermal plasmas, i.e. ionized gases that are out of thermodynamical equilibrium, can be used for biological applications such as food decontamination, plasma medicine, environmental remediation and plasma agriculture, a rapidly emerging field. In 2017, we have started equipping a new laboratory at SPC, called bio-plasmas laboratory, which will explore the huge potential of non-thermal plasmas in a variety of societal applications. Three projects have already started: in collaboration with the University of Lausanne, we investigate the mechanisms governing plasma-seed interactions. Within an InnoSuisse project and in collaboration with FELCO SA, the Ecole d'Ingénieurs de Changins and HES-Yverdon, we are developing a plasma-based sterilizer to treat plants contaminated by infectious bacterial diseases. Together with ETH Zurich and in collaboration with the SPC spin-off company Helyssen Sàrl, we are developing high-pressure antennas for food and powder treatment.


INDUCTIVELY-COUPLED PLASMA USING A PLANAR RF RESONANT ANTENNA FOR SOLAR CELLS

In the photovoltaic industry, fast deposition of silicon tends to form porous films, which consequently suffer from post-oxidation on exposure to air, resulting in poor quality photovoltaic material. At SPC, it was shown that post-oxidation can be suppressed using large-area inductive sources provided that RF substrate bias is applied to control the ion bombardment energy. This enhances the surface mobility of radicals, thus compacting the growing film.

HUMAN PROSTHESIS

Advanced materials for human prosthesis require the development of new technologies to improve barrier properties of protective thin films. In collaboration with COMELEC SA in the framework of an InnoSuisse project, the SPC develops a high barrier SiO_2 coatings using PECVD (Plasma Enhanced Chemical Vapour Deposition) with a large volume plasma source (bird cage antenna) and explores the limits of SiO_2 thin film conformity on high aspect ratio samples. By optimizing the ion bombardment at different bias voltages, the barrier properties of the SiO_2 thin films were improved by a factor 100.

1

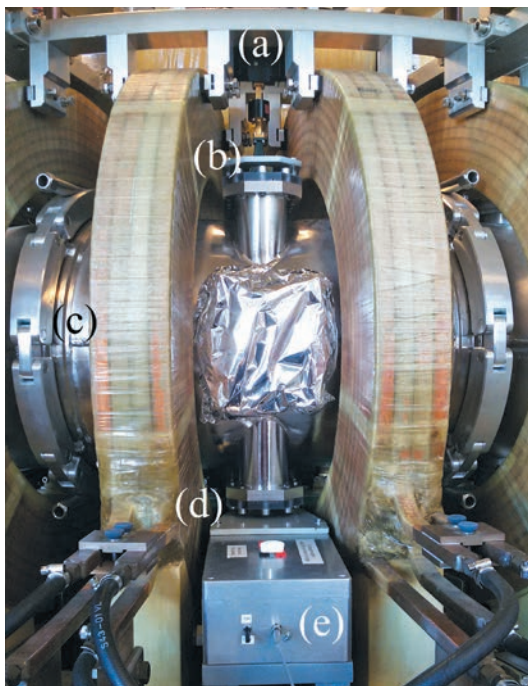


1 Microwave system installed in TORPEX. (a) microwave source; (b) microwaves are injected on top; (c) TORPEX vessel and toroidal magnetic field coils; (d) microwaves exit on the bottom; (e) detector.


2 Experimental setup in TORPEX (a). Snapshots of measured density fluctuations (b)(c)(d) obtained from an array of Langmuir probes. The pink shaded area represents the mmw beam.

3 Numerical simulation of the beam scattering (levels of grey) by turbulent density fluctuations (colored contours).

2

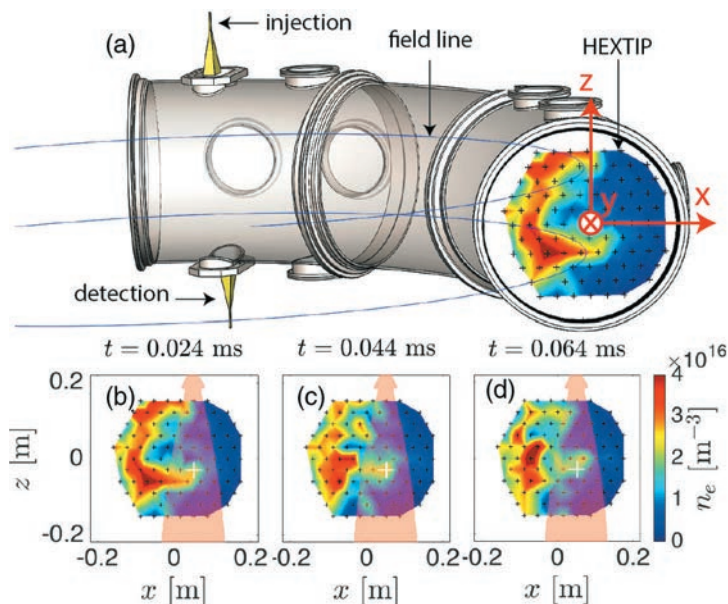

3



TURBULENT SCATTERING OF MICROWAVE BEAMS




Oulfa Chellai, PhD student at SPC, supervised by Prof. Ivo Furno and Dr Tim Goodmann, obtained the Best Student Poster Award at the 2017 International Conference on Radiofrequency Power in Plasmas. She explains below why her research is crucial for fusion.

High-power microwave sources at the electron cyclotron frequency are an essential feature of the ITER design. They can be used to heat the plasma, to drive plasma current and also to control certain instabilities, called neoclassical tearing modes, which can be responsible for core confinement degradation. For that purpose, a narrow millimeter beam will be targeting the plasma core with a surgical precision. When entering the plasma, the beam will traverse a turbulent plasma layer with strong fluctuations of the electron density, called “blobs”, acting to scatter the beam. This could result in a decrease of efficiency in the use of microwaves.

A European collaboration was initiated in the frame of the Enabling Research Programme of EUROfusion to study this effect. On TORPEX, with a dedicated experimental setup, we have shown the first direct experimental measurements of the scattering of a millimeter-wave beam by plasma blobs in a simple magnetized torus. A first-principles full-wave model predicts fluctuations of the millimeter-wave power that are in agreement with experiments. These groundbreaking results have been published in *Physical Review Letters*.

Similar experiments were run on the TCV tokamak. The turbulence at the edge of the device was identified as being responsible for the fluctuations of the millimeter-wave beam power. A numerical effort is under progress using the GBS turbulence code to simulate the beam propagation in the turbulent plasma of TCV and reach predicting capabilities for ITER.

Applied Superconductivity

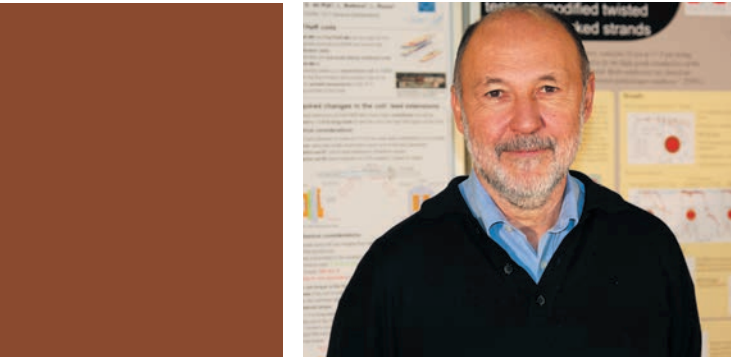

Based on the site of the Paul Scherrer Institute in Villigen, the activities of the Applied Superconductivity group are focused on design studies, R&D and testing for magnet technology. Both Low-Temperature and High-Temperature Superconductors (LTS and HTS) are investigated, with a primary focus on future fusion devices. The main experimental tool is the SULTAN test facility, a unique equipment that allows SPC to carry out tests of high current superconductor cables and joints, in particular for ITER and EUROfusion DEMO, recently also for CERN.

The Applied Superconductivity group is led by Dr **PIERLUIGI BRUZZONE**, who explains here what the main achievements of his group were.

DESIGN AND ANALYSIS OF THE SUPERCONDUCTING MAGNETS

The design of a high field (up to 17Tesla) Central Solenoid for DEMO have been completed, including mechanical and electro-magnetic analysis. The design of this “hybrid” magnet is described in more details on the next page.

The design and analysis of the Toroidal Field (TF) and Poloidal Field (PF) coil systems for DEMO has been updated, including the refinement of the layer grading in the TF winding pack, leading to a 20% reduction of the radial build.

DEVELOPMENT

The second prototype of DEMO conductor based on wind&react Nb_3Sn technology was tested with two samples (*More on wind&react vs react&wind: see separate text box*). The main objective was to develop a more efficient conductor than that of ITER, namely provide slightly better performance with lower amount of expensive Nb_3Sn material. Encouraging are the low AC losses and initial performance of the prototype, disappointing was the conductor degradation during long-term operation for the first sample. This, however, substantially improved for the second sample.

An InnoSuisse/KTI project for high-field solenoids made of HTS coated conductor tapes was successfully completed. This industrial R&D on smaller-scale magnets has an interesting potential to increase the magnetic field range in commercial magnets for laboratory and for nuclear magnetic resonance (NMR) used in research.

TESTING ACTIVITIES IN SULTAN


Tests of conductor samples and joints for the ITER magnets are an important task for quality control of ITER construction. This testing is a major task of the superconductivity group, occupying most of the SULTAN operating time. A specific testing action started in 2017 to address the cyclic loading degradation in the TF conductors, applying only a partial load.

Tests of LTS conductor samples and joints for DEMO, as well as the tests of a prototype HTS high current conductor (CORC) for particle detector.

For CERN, test of a prototype HTS dipole insert magnet made by a cable of coated conductors and wind&react Nb_3Sn joints for the accelerators of the Future Circular Collider (FCC).

The high-field fusion magnets are built from Nb_3Sn – an expensive material, whose crystalline structure is created by heat treatment at 650°C. After the heat treatment, also called “reaction”, the Nb_3Sn material becomes brittle. The designers of ITER decided to wind the Nb_3Sn conductors into coils, and heat-treat them in the final shape. The disadvantage of this **wind&react** technique is the “thermal strain”, i.e. the compression state of the superconducting wires in the coil, due to the different thermal expansion coefficients of Nb_3Sn and steel jacket of the conductor, respectively, which reduces the current-carrying capability of Nb_3Sn . On the other hand, in the **react&wind** method the Nb_3Sn cable is heat-treated before assembly into the jacket and wound to its final shape. In this way the thermal strain is drastically reduced and the performance of the conductor is enhanced. In large coils, with big bending radii, the brittle Nb_3Sn can withstand the necessary bending associated to the react&wind technique. Eventually, much less amount of Nb_3Sn strands is needed to carry the same electric current in the magnet.

HIGH TEMPERATURE SUPERCONDUCTORS CAN BE USED TO REDUCE THE SIZE AND COST OF A TOKAMAK FUSION REACTOR




Research carried out by Nikoaly Bykovskiy, PhD student at SPC under the supervision of Dr Pierluigi Bruzzone and Prof. Ambrogio Fasoli, was instrumental in opening new perspectives for the design of tokamak reactors. The Central Solenoid (CS) is an essential component of the tokamak. Its main role is analogous to the primary of a transformer. It provides a large magnetic flux swing, which induces huge currents in the plasma, which plays the role of the secondary. Being placed at the heart of the device, it is exposed to very strong magnetic fields, and is also not easy to remove for maintenance, and thus has to be very reliable.

It is therefore a particularly challenging piece of equipment to design. In 2017, the Superconductivity group of SPC has achieved an important milestone by proposing a hybrid CS design for DEMO that looks very promising.

The proposed design aims to reduce the outer diameter of the CS for a requested magnetic flux. A more compact CS allows the reduction of the size of the whole tokamak, and consequently also a reduction of the overall manufacturing cost of DEMO. The generation of the same magnetic flux in a smaller CS leads to an increase of the magnetic field inside of the winding of the CS coil. The only superconductors that can withstand such a huge magnetic field are high-temperature superconductors (HTS).


Today, the cost of HTS is still significantly higher than that of low-temperature superconductors (LTS). In order to use the expensive material efficiently, the proposed CS is hybrid – the HTS, namely $\text{REBa}_2\text{Cu}_3\text{O}_{7-x}$ (RE = rare earth element), is employed only in the four innermost layers, where the magnetic field is highest, whereas the other 16 layers will be made of LTS, namely Nb_3Sn and NbTi , as illustrated in Figure 1. Because of the decline of the magnetic field from inner to outer radius of the winding pack, the superconductor cross section can be reduced in the outer layers. Also the amount of steel in the conductor jacket, which provides mechanical stiffness to the CS, can be reduced towards the outer radius.

The hybrid design reduces the outer radius of the CS by 15% (or 50 cm), compared to the reference DEMO design based on the Nb_3Sn technology. The peak magnetic field at the CS conductor is as high as 17.5 T, compared to 13.5 T in the ITER CS made of Nb_3Sn . A sketch of the 51 kA HTS conductor is presented in Figure 2. The current is carried by 12 strands of 7.2 mm diameter, which are wound around a central copper core. Each strand consists of 39 HTS tapes. Two 3 m long HTS conductor prototypes were already successfully manufactured and tested at SPC showing an initial performance in line with expectations. Measures to avoid conductor degradation during long term operation are subject of ongoing research and development.

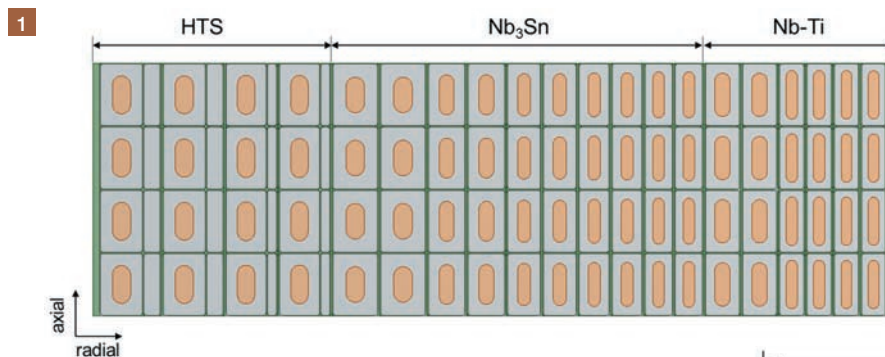

1 Layout of the four central conductor rows of the CS coil.

2 Sketch of the HTS conductor at highest field.

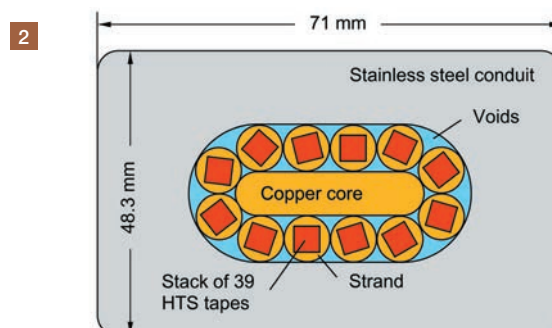

International Activities – ITER



The Swiss Plasma Center is embedded in a tight network of collaborations, not only at the European level, but also in the frame of worldwide projects, in particular ITER. Efforts, led by Dr **TIM GOODMAN**,

are mainly devoted to two main areas, namely the field of high power microwaves and the testing of superconductors for the coils (the latter is reported in the Section on Superconductivity).

The objectives of the international collaborations for ITER in the field of high power microwaves are twofold.

First, to design, test and verify the gyrotron for ITER developed by the EU. This gyrotron will operate at the frequency of 170GHz, have a power of 1MW, and a pulse duration of 3600s. Both design and testing are carried out by a consortium called EGYC, in which the Leading Laboratory is SPC. The gyrotron is manufactured by THALES. The testing is done at an ad-hoc facility at our premises.


Second, to design, test and verify components of the EC Upper Launcher (UL) for ITER. The design is carried out by the ECHUL consortium, in which Dr Jean-Philippe Hogge, MER, is the Deputy Project Leader for mm-wave design. The testing is carried out by SPC using a gyrotron supplied by Fusion For Energy (F4E, the EU ITER Domestic Agency) and purchased from GYCOM.

The EU ITER gyrotron was delivered to SPC following preliminary testing at our EGYC partner KIT (Karlsruhe, Germany) and the preparation of the SPC dual test facility. A second gyrotron tower was introduced to share all gyrotron subsystems. These were designed and tested in collaboration with F4E. The subsystems worked well during gyrotron testing. Both ITER-class gyrotrons were tested to near 0.8MW for nearly one minute and pulse lengths up to 300s at half power.

Components that require improvement to allow reaching 1MW and 3600s pulses have been identified, potential solutions have been proposed, and discussions with international partners continue with the goal to action solutions and extend systems operation in 2018.



The two gyrotron towers of the test facility at SPC. Both gyrotrons are ITER-class, 1MW, 1000s, 170GHz tubes, similar to those that will power one of the 8 beams of the ITER Upper Launcher, seen on the opposite page. The left one is the EU gyrotron manufactured by THALES, the right one is the gyrotron manufactured by GYCOM used to test components of the ITER Upper Launcher.


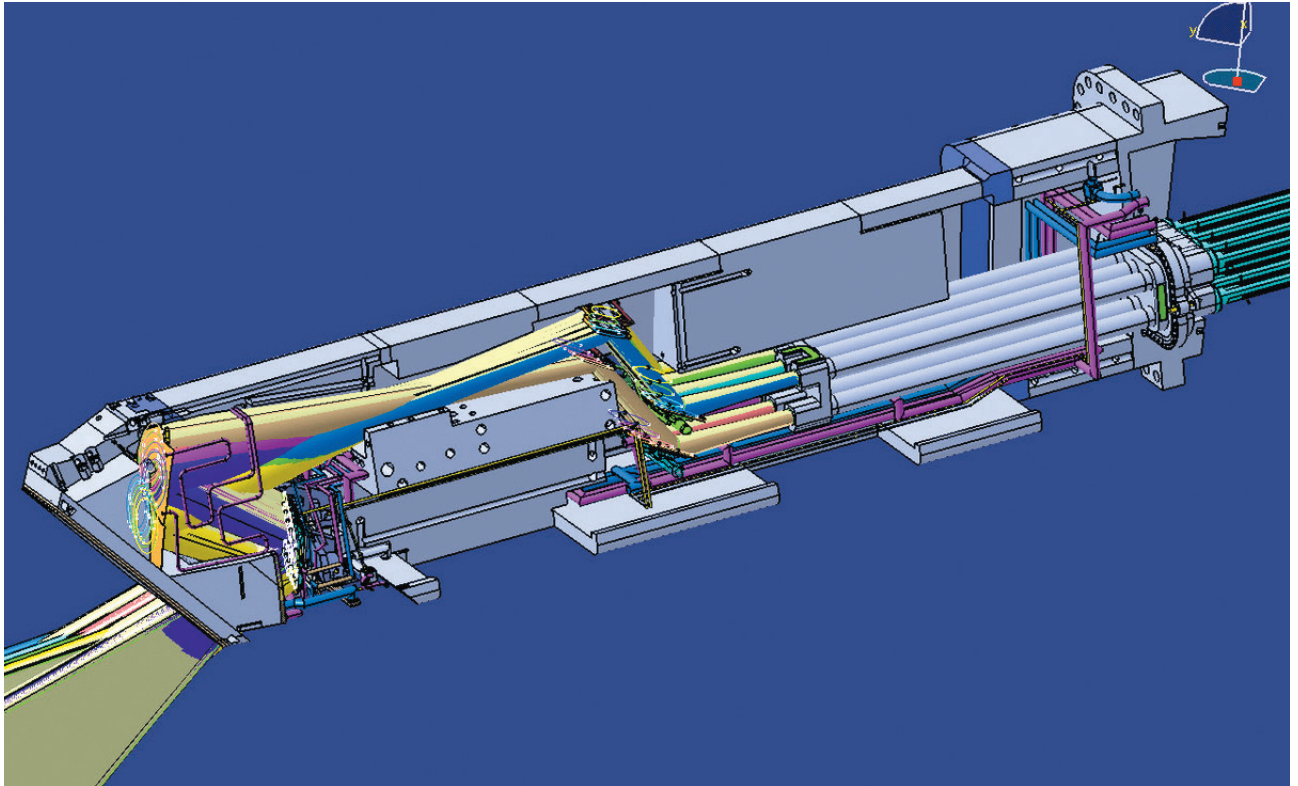


Sketch of one of four identical ITER Upper Launchers (UL) used primarily for a) plasma initiation of the ITER first plasma and b) stabilization of certain modes in the plasma. Two rows of 4 ex-vessel waveguides enter from the right through a double-closure-plate-subplate and continue, in-vessel, through neutron shielding to launch 8 mm-wave beams. Each beam reflects off of 4 surfaces before exiting the launcher (left); the last mirror can be rotated to aim at different locations in the plasma: there are two mirrors that steer the 4 beams of each row as a group; they have different steering ranges. The steering ranges can be seen as the fans on the left. The second and third mirror surfaces along the beam path are optimized to produce a narrow deposition location and strongly localized driven current channels in the plasma, while satisfying the strict spatial constraints within the launcher structure.

ITER, EUROPE AND SWITZERLAND

The construction of ITER continues at full speed. After ten years of the ITER Treaty, and of the establishment of the Domestic Agencies, including Fusion for Energy in Europe, of which Switzerland is a full member, more than half of the ITER infrastructure is now built. This important milestone confirms that the project culture introduced in the past few years is bearing fruit. The revised project baseline foresees the first plasmas in 2025 and the first high performance experiments with full fusion fuels in 2035. ITER is strengthening its links with the scientific and academic community using mechanisms such as the ITER Fellows program, the ITER Operations Network, and the International Tokamak Physics Activities. Members of our Center are at the forefront of all these initiatives. At the European level, a major effort of coordination and focusing of the program to be conducted in parallel to ITER is undertaken within the EUROfusion consortium, which operates on behalf of Euratom, to which Switzerland is associated. The European Roadmap to fusion energy is being revised and is set to become the new reference to all fusion R&D across Europe.



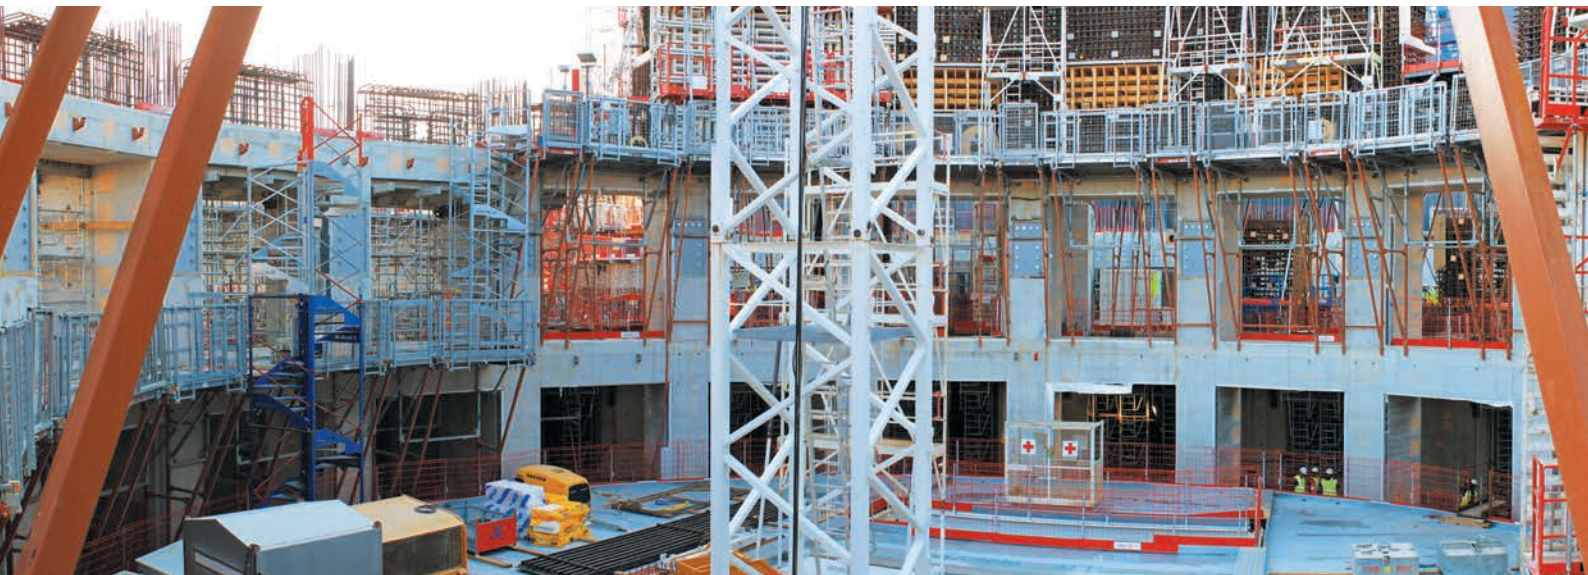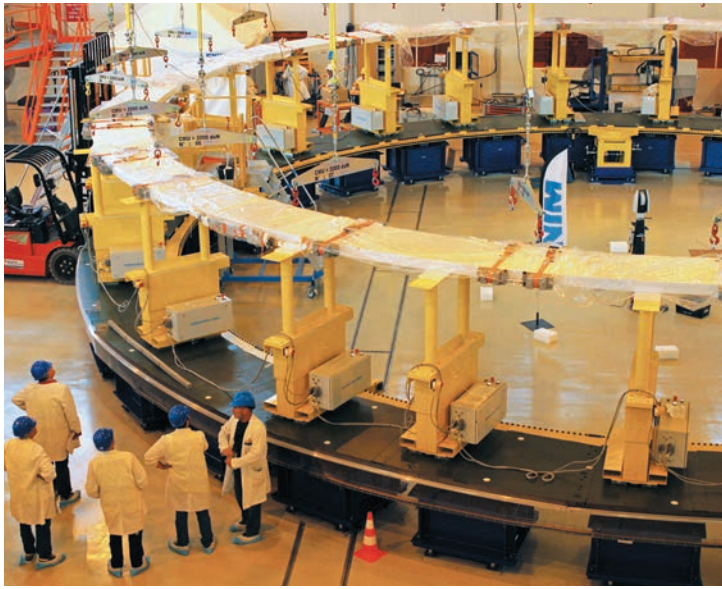

TEACHING

The Swiss Plasma Center has a very important role in education. Our position, fully embedded in the Faculty of Basic Sciences of the EPFL, is a clear asset in order to fulfil one of our most important missions of educating the future generations of physicists and fusion scientists. At the end of 2017 the SPC had 35 PhDs enrolled in the Doctoral School of EPFL and 16 post-docs. In 2017, 9 candidates obtained their PhD: Himank Anand, Nikolay Bykovskiy, Jonathan Faustin, Zhouji Huang, Claudio Marini, Federico Nespoli, Fabio Riva, Joyeeta Sinha and Christoph Wersal.






One of our PhD students at SPC, **FABIO RIVA**, obtained the EPFL Physics Doctoral Award 2017 for his thesis, carried out under Prof. Paolo Ricci's supervision, entitled "Verification and validation procedures with applications to plasma-edge turbulence simulations".

SPC staff is teaching several classes in general physics and computational physics at the Bachelor level. SPC has created a Massive Open Online Course (MOOC) on Plasma Physics and Applications, which in 2017 was in its 3rd edition and attracted 7942 participants from all over the world.

Map showing the locations of the participants to the SPC MOOC course on Plasma Physics and Applications.

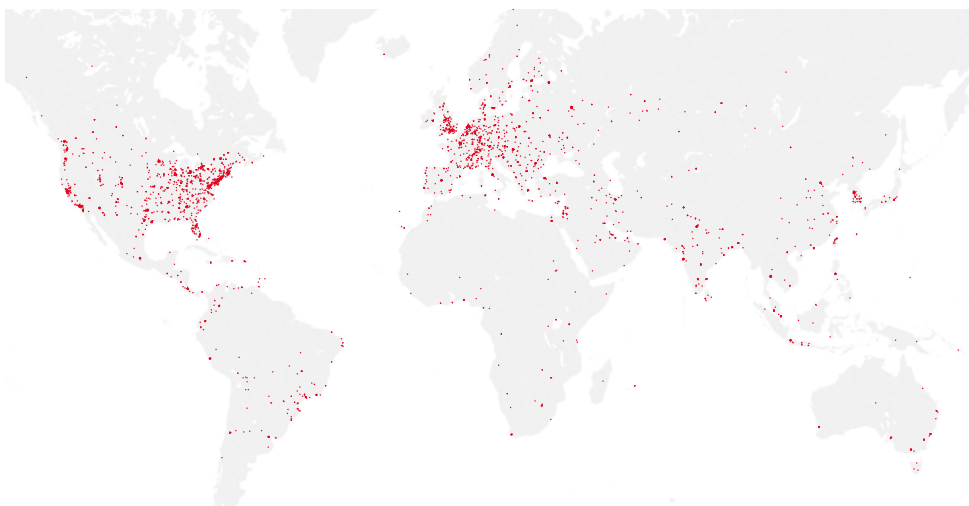

SPC is providing a complete curriculum of plasma physics courses, ranging from introduction at the Bachelor level, to specialized courses at Master and Doctoral levels, at the EPFL and in the context of European-wide education initiatives (FUSENET).


714	The number of hours of Bachelor and Master courses taught by SPC staff in 2017
130	The average number of students in a class of these Bachelor and Master courses
92680	The number of student-hours for Bachelor and Master courses taught by SPC staff in 2017
112	The number of hours of Doctoral courses taught by SPC staff in 2017
7942	The number of participants to the MOOC on Plasma Physics taught by SPC staff in 2017
35	The number of PhD students at SPC by the end of 2017
9	The number of PhD theses at SPC awarded in 2017



PROFS PAOLO RICCI (LEFT) AND LAURENT VILLARD (RIGHT) OBTAINED THE EPFL BEST TEACHER AWARD IN PHYSICS IN 2016 AND 2017, RESPECTIVELY.

OUTREACH

The Swiss Plasma Center recognizes the importance of outreach activities, and conducts a variety of initiatives, encompassing visits of the Center, conferences given onsite or outside, and the publication of printed or electronic documents.


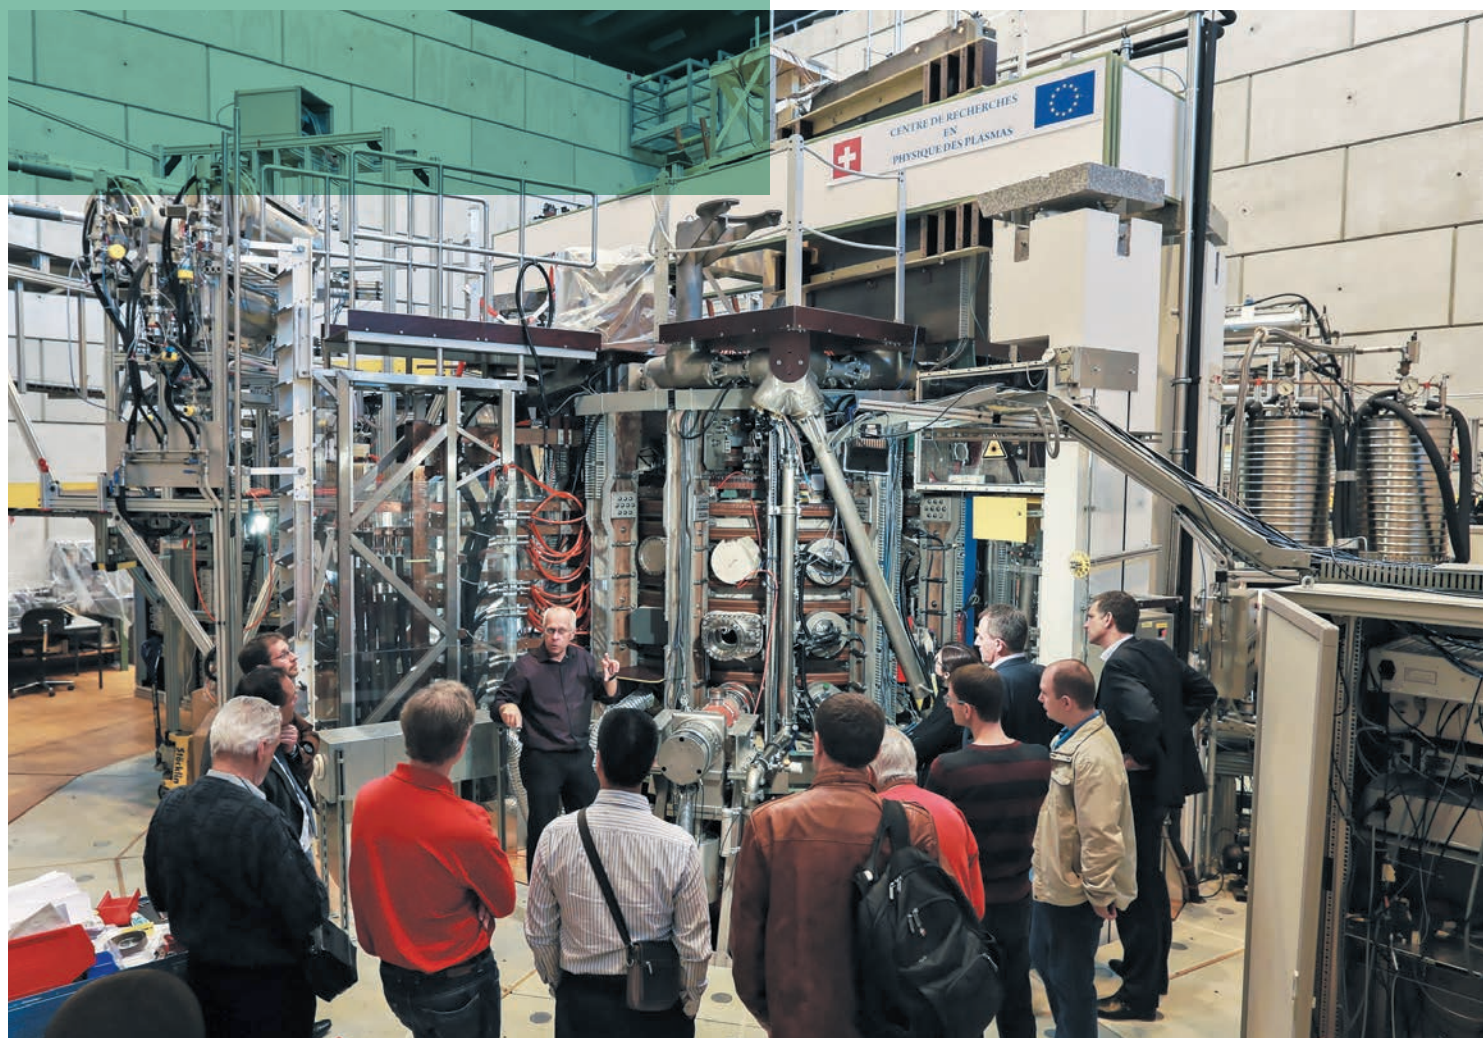


In 2017, more than 3200 persons were introduced to plasmas and fusion via a series of slides and visited the SPC major experimental halls: TCV, TORPEX, RAID. Visitors are essentially students, mostly from high schools or universities, EPFL included, the remaining part consisting of groups from companies involved in R&D or willing to have a scientific tour during a more recreative day out.

Our PhD students are actively participating to the outreach activities, which we consider as part of their curriculum in order to improve their vulgarization skills.

Didactic experiments have been manufactured to illustrate principles occurring in fusion plasmas or used to diagnose plasmas.

Plasma physics, fusion and SPC activities have also been presented in external events, for instance in the frame of TecDays, Scientastic Festival, Nuclear Forum Meetings.

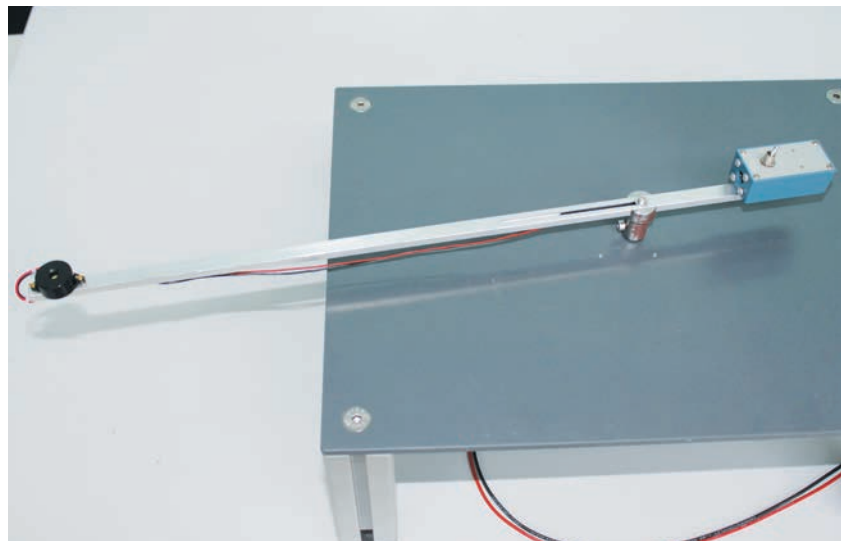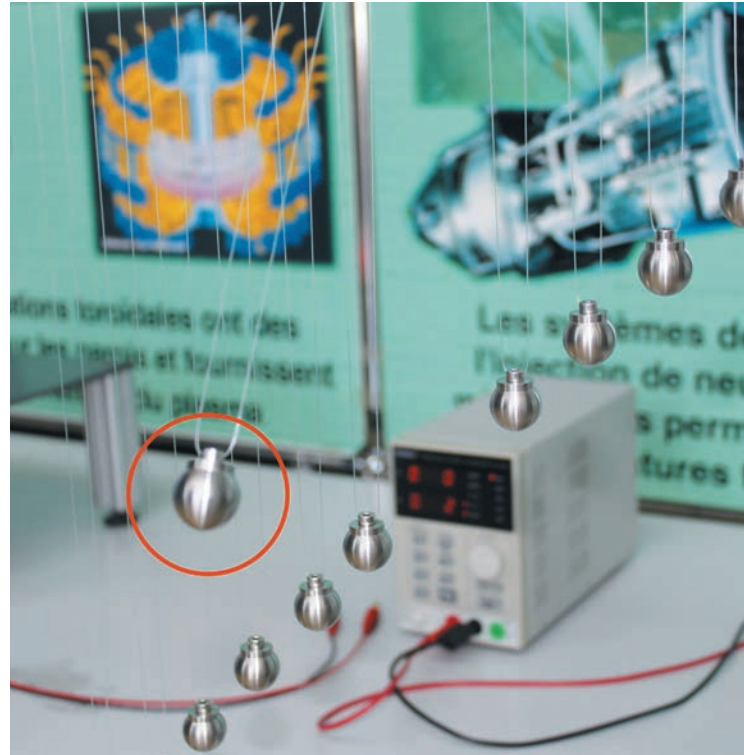

SERVICES AND ADMINISTRATION

The Swiss Plasma Center could not reach its objectives without a strong technical and administrative support.



Dr Yves Martin


CAO & HEAD OF
SERVICES



Dr Christian Schlatter

CFO

Thomson detector holders

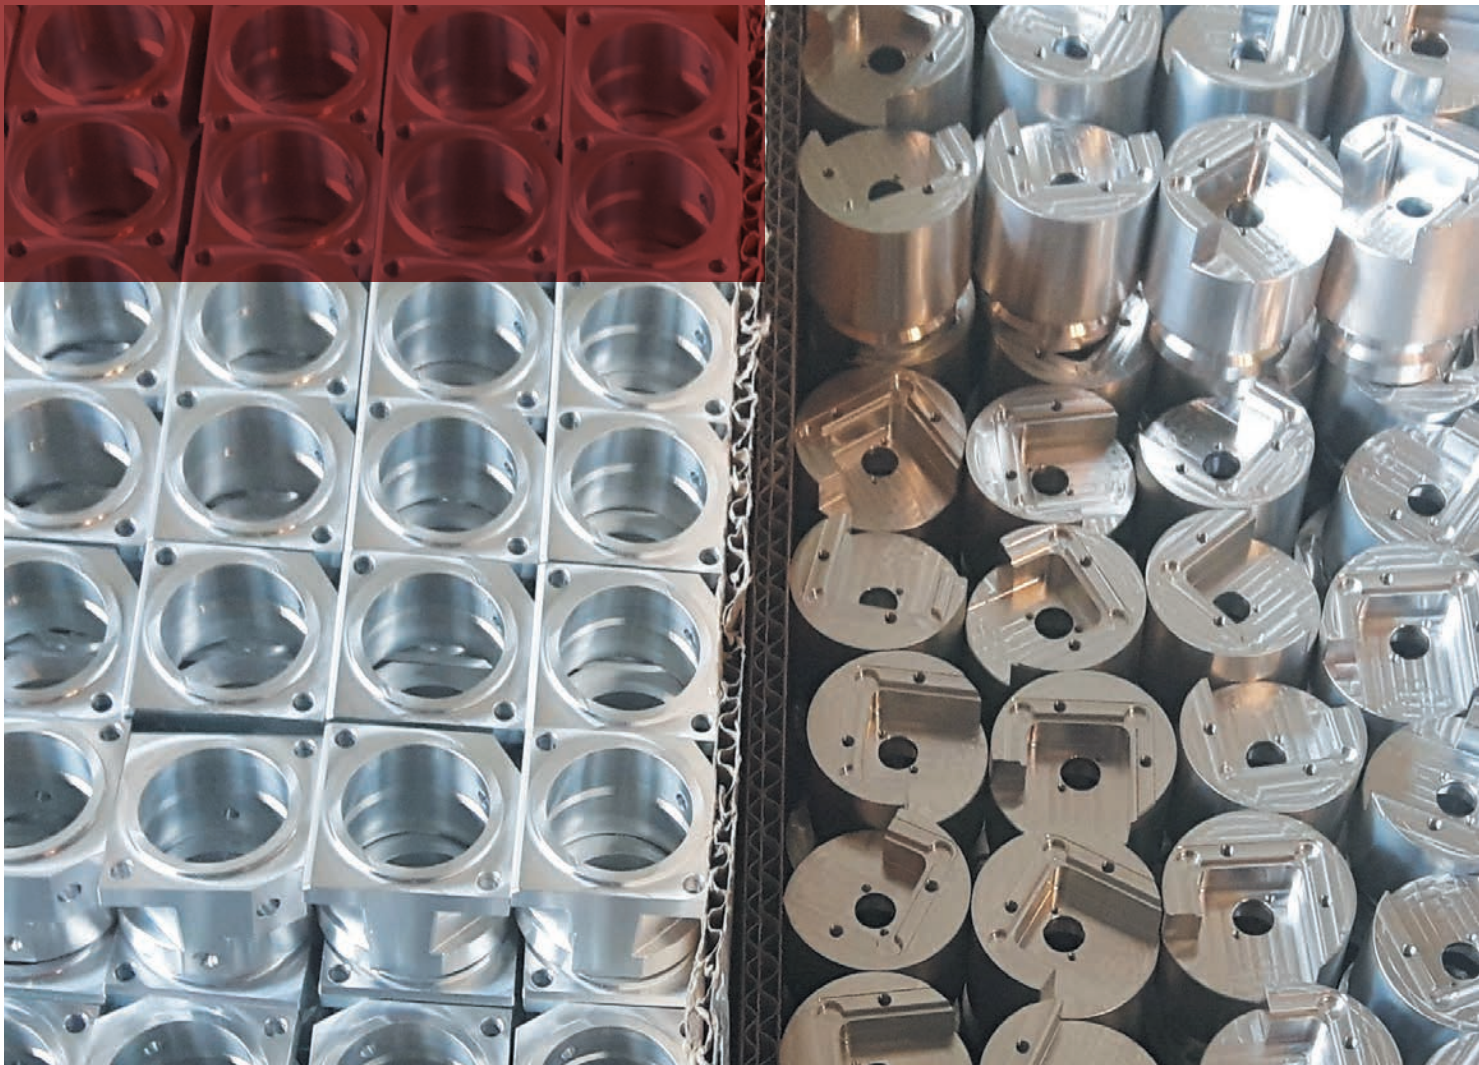

The technical support is provided by almost 50 engineers and technicians allocated in five technical services:



Matthieu Toussaint

MECHANICS
CONSTRUCTION
OFFICE AND
WORKSHOP



Frédéric Dolizy

VACUUM TECHNIQS



Damien Fasel

ELECTRICAL
HIGH POWER
INSTALLATIONS



Blaise Marlétaz

ELECTRONICS



Dr Xavier Llobet


IT

The administrative and financial team is composed of 7 persons.


Among the large amount of contributions performed by all services for all Research Lines, the following salient projects have been achieved:

- Installation of a switch on high current leads for TCV: the main toroidal magnetic field can now be reversed automatically between discharges.
- Improved Thomson scattering diagnostic for TCV: A series of additional spectrometers have been completed, which required manufacturing of monobloc boxes and detector holders; mounting of electronics; installation of optical fibers, cabinets, cabling; and implementation of the data acquisition system.
- NBI profile measurement: A tungsten plate, positioned at 45° relative to the neutral beam has been equipped with thermocouples and IR camera to assess the shape of the beam.
- Langmuir probes improvement: new electronics.
- Metrology of the gyrotron test facility hall: Laser targets have been fixed at several positions within the hall as well as on existing equipment to allow for a precise positioning of new apparatus.
- Cooling system for gyrotrons: since both 1MW gyrotrons used for ITER tasks will be operated alternately, a unique cooling system, serving both gyrotrons has been designed and implemented.
- Cooling circuit for RAID: the beam source had to be cooled by a water circuit specially designed to fit the small space between the cylindrical plasma source and the magnetic coils.


Switch on high current leads for TCV

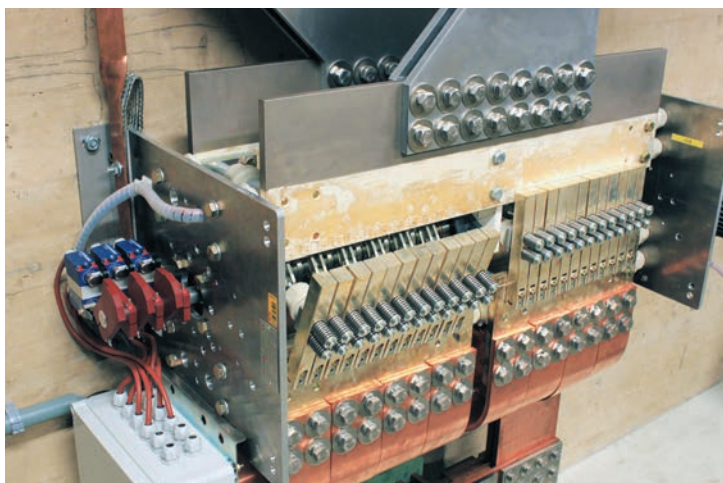


Thomson detectors

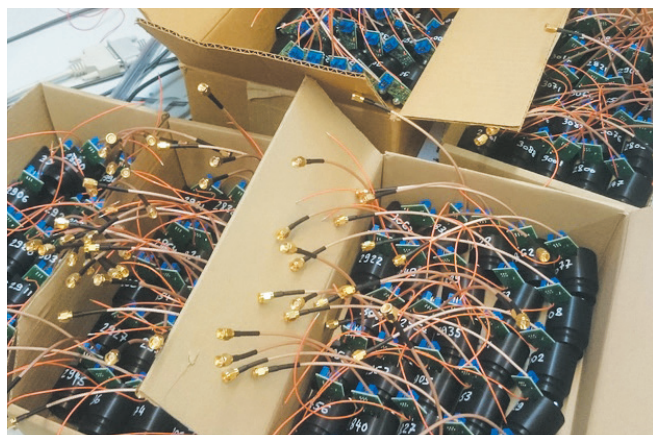


Thomson optical fibers

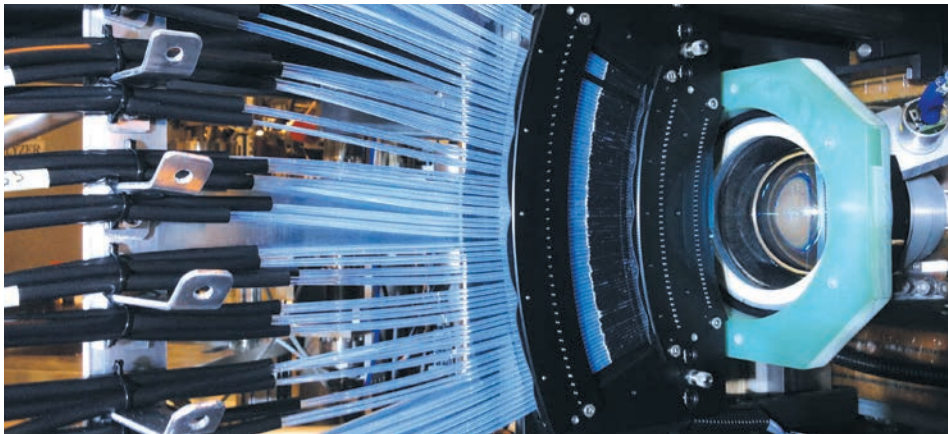


Acquisition system

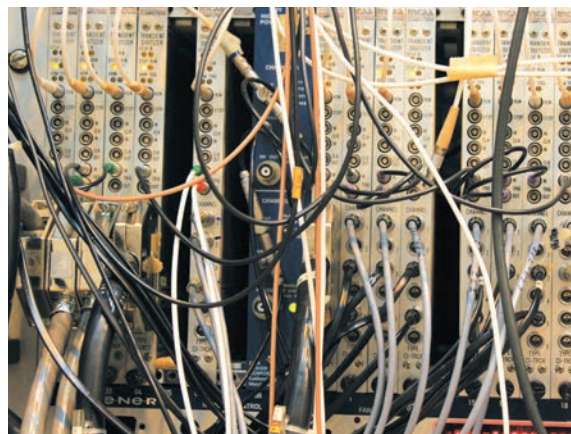


Electronics for Langmuir probes

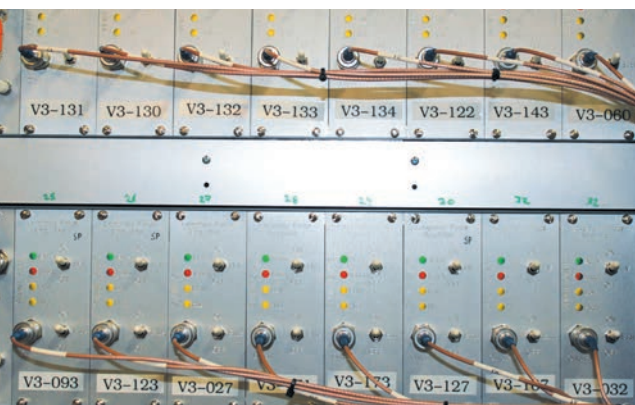


Gyrotron cooling

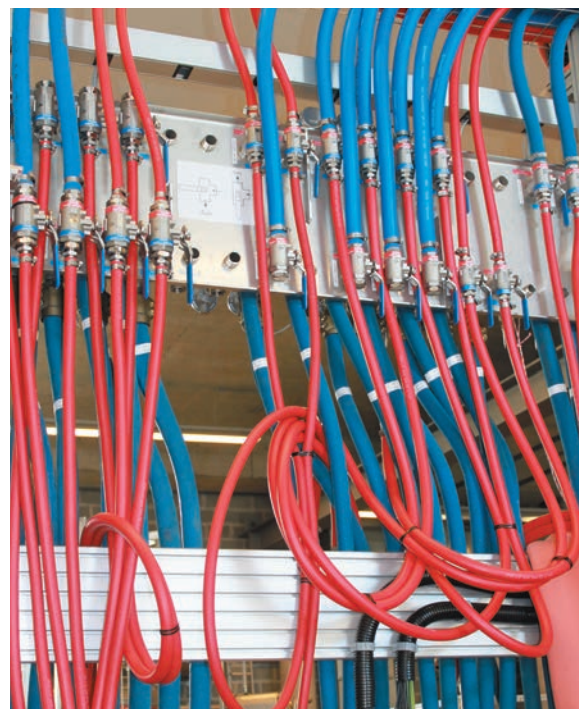


NBI profile measurement

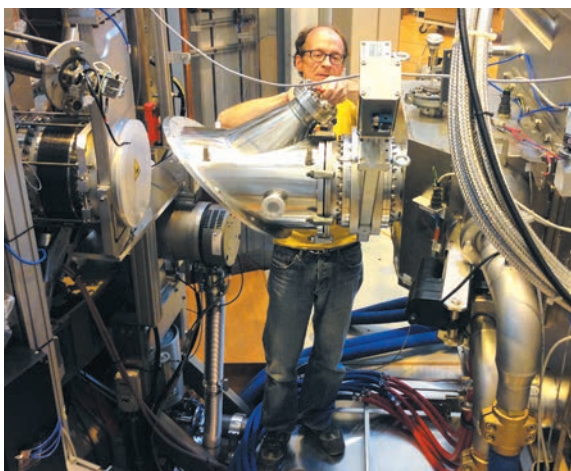

Cooling system for RAID: design and thermal analysis

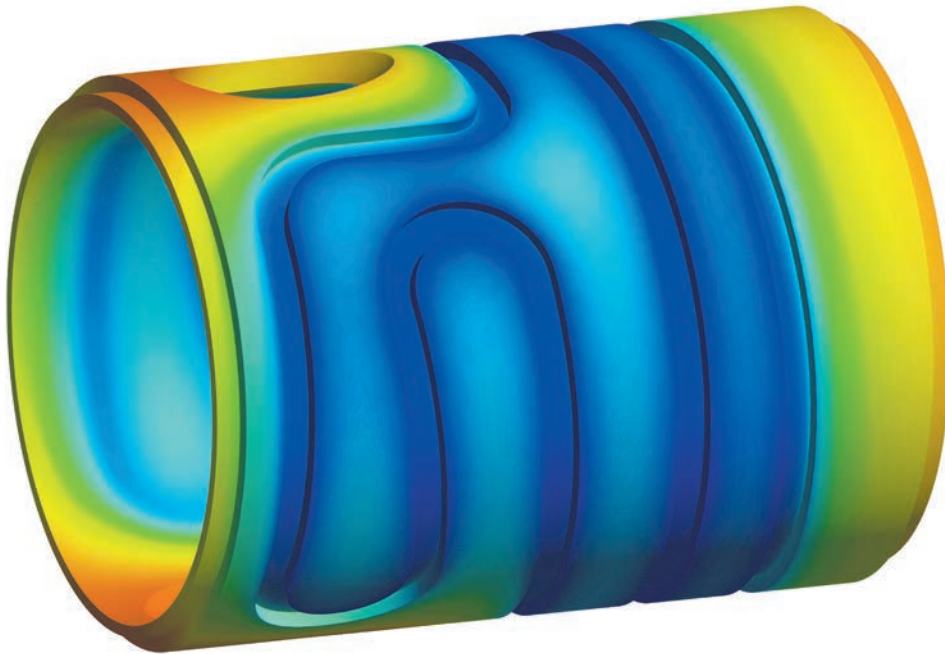

Cooling system for RAID: as built

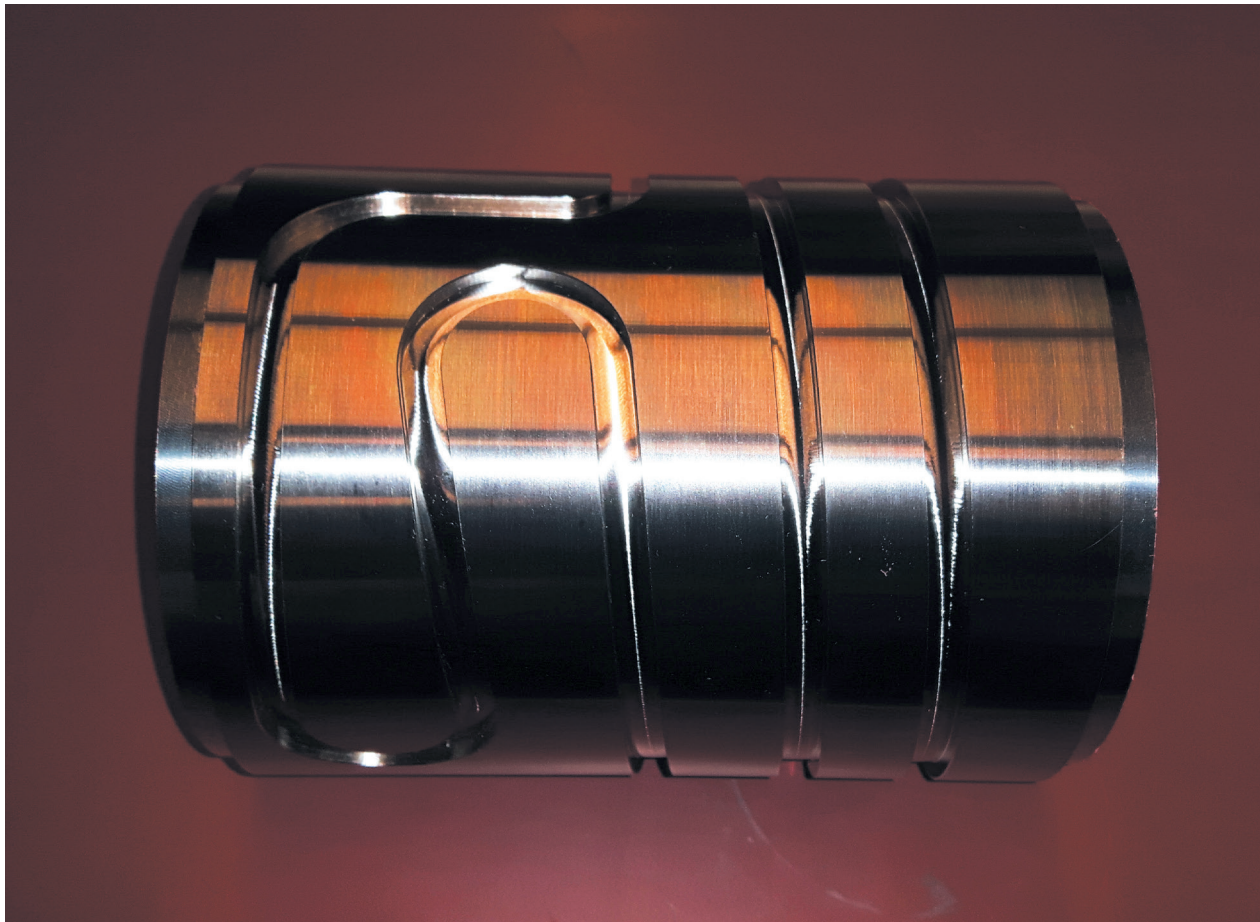


FACTS AND FIGURES




FUNDING 2017

incl. indirect costs

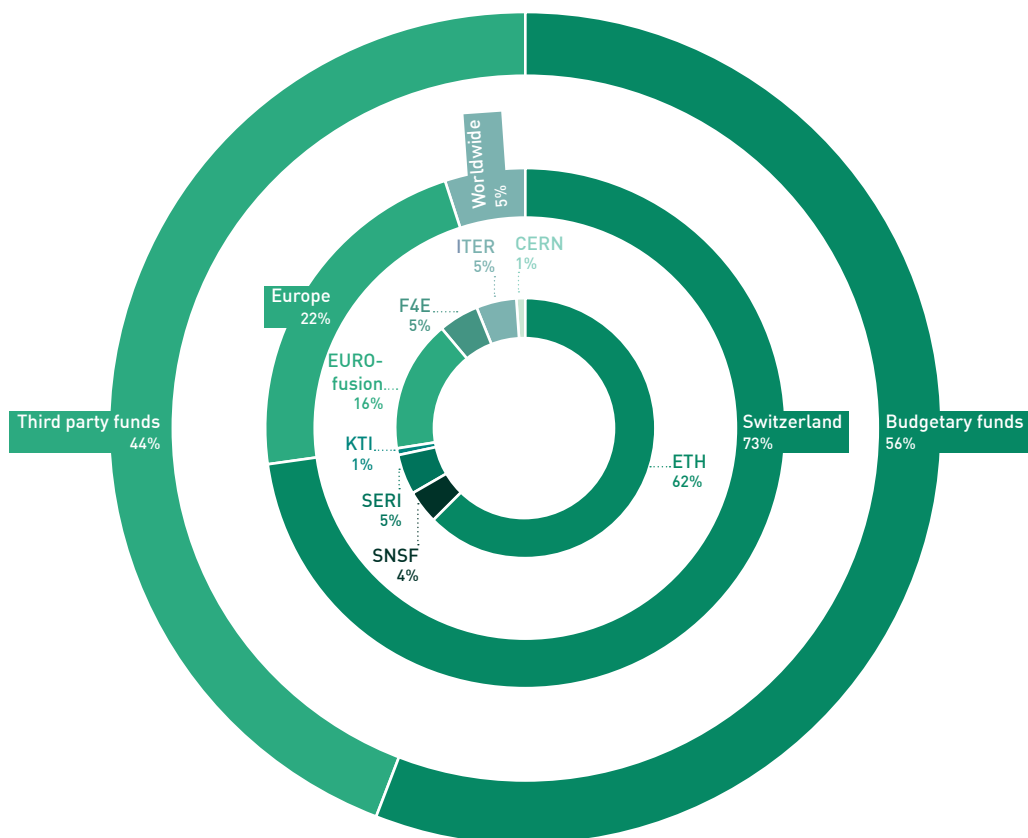


EUROPEAN COMMISSION CONTRIBUTION IN [MCHF]

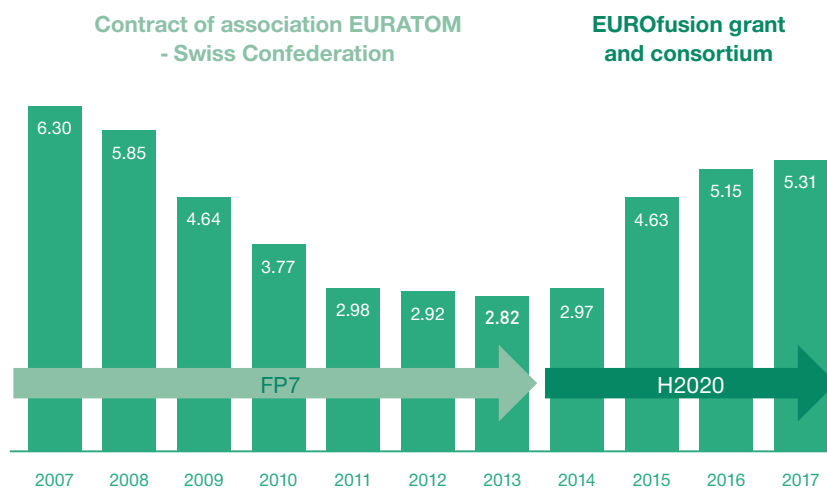

HUMAN RESOURCES

149	Employee headcount at SPC, of which
39	PhD students
17	Post-Docs
131.3	Full Time Equivalent
14	Collaborators joined SPC
15	Collaborators left SPC

STRUCTURE

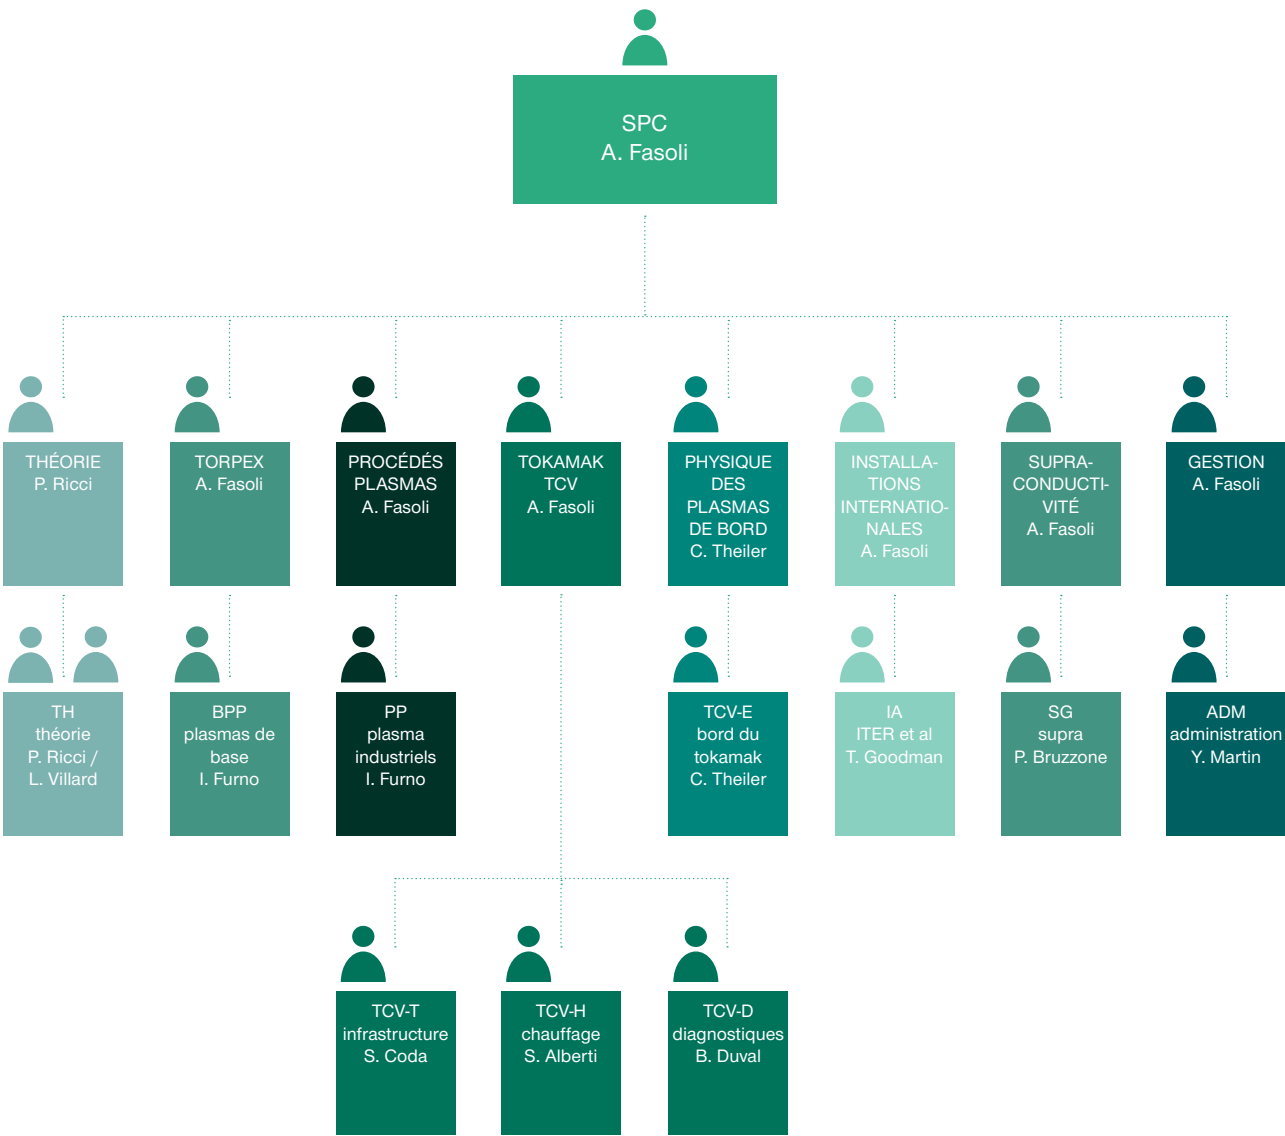



spc.epfl.ch

PROJECT Swiss Plasma Center @EPFL

DESIGN AND ILLUSTRATIONS cullycully.studio, Switzerland

PRINTING Polygravia Arts Graphiques SA, Switzerland

Photos © SPC@EPFL - pages 24, 25: © F4E, ITER - pages 26, 27, 28: © Alain Herzog

© Swiss Plasma Center @EPFL 2018

SWISS PLASMA CENTER (SPC)

EPFL SB SPC

Station 13

CH - 1015 Lausanne

Switzerland

spc.epfl.ch



[@TCV_tokamak](https://twitter.com/TCV_tokamak)