

# Alliance Concept EVA760 Uniformity Masks Installation

## 1. 450 mm

- After installing the dome, pull the mask upwards until it is clipped together horizontally.

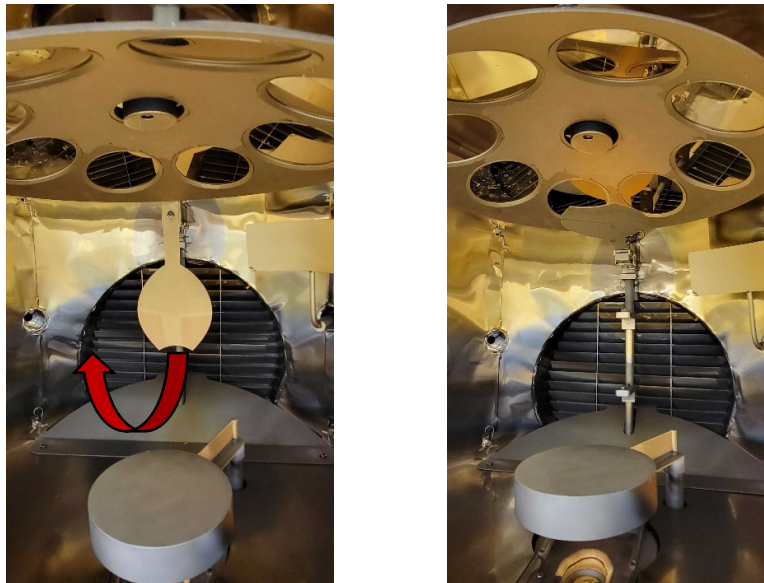



Figure 1: Left : Mask 450 mm in down position. Right : Mask 450 mm in up position, ready for the evaporation.

## 2. 350 mm and 250 mm

- First, without the dome installed, put the 450 mm Mask in the horizontal position (see point 1) and remove the pin. Be careful when removing the pin to not damage / bend it.



- Put the 450 mm mask back to its down position, rotate it fully to the left and place the pin back.

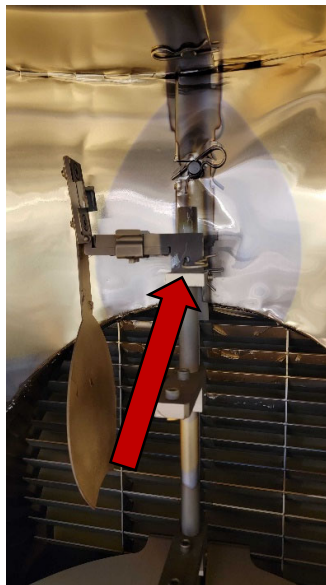

- Untight and remove the two the screws, place either the 250mm or the 350 mm and tight the 2 screws fully back in. The 250 mm mask goes on the bottom slot, the 350 mm one on the top slot. The mask is now ready.

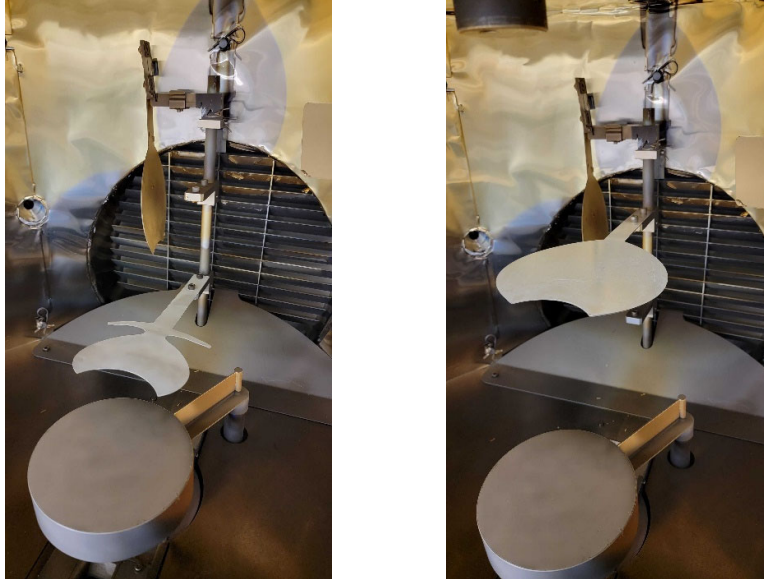


Figure 2: Left : 250 mm Mask screwed in place. Right : 350 mm Mask screwed in place.

- After the evaporation, follow the protocol in the inverse order to dismount the mask. Please tight the screws fully back in to avoid any material to deposit on the thread.

